
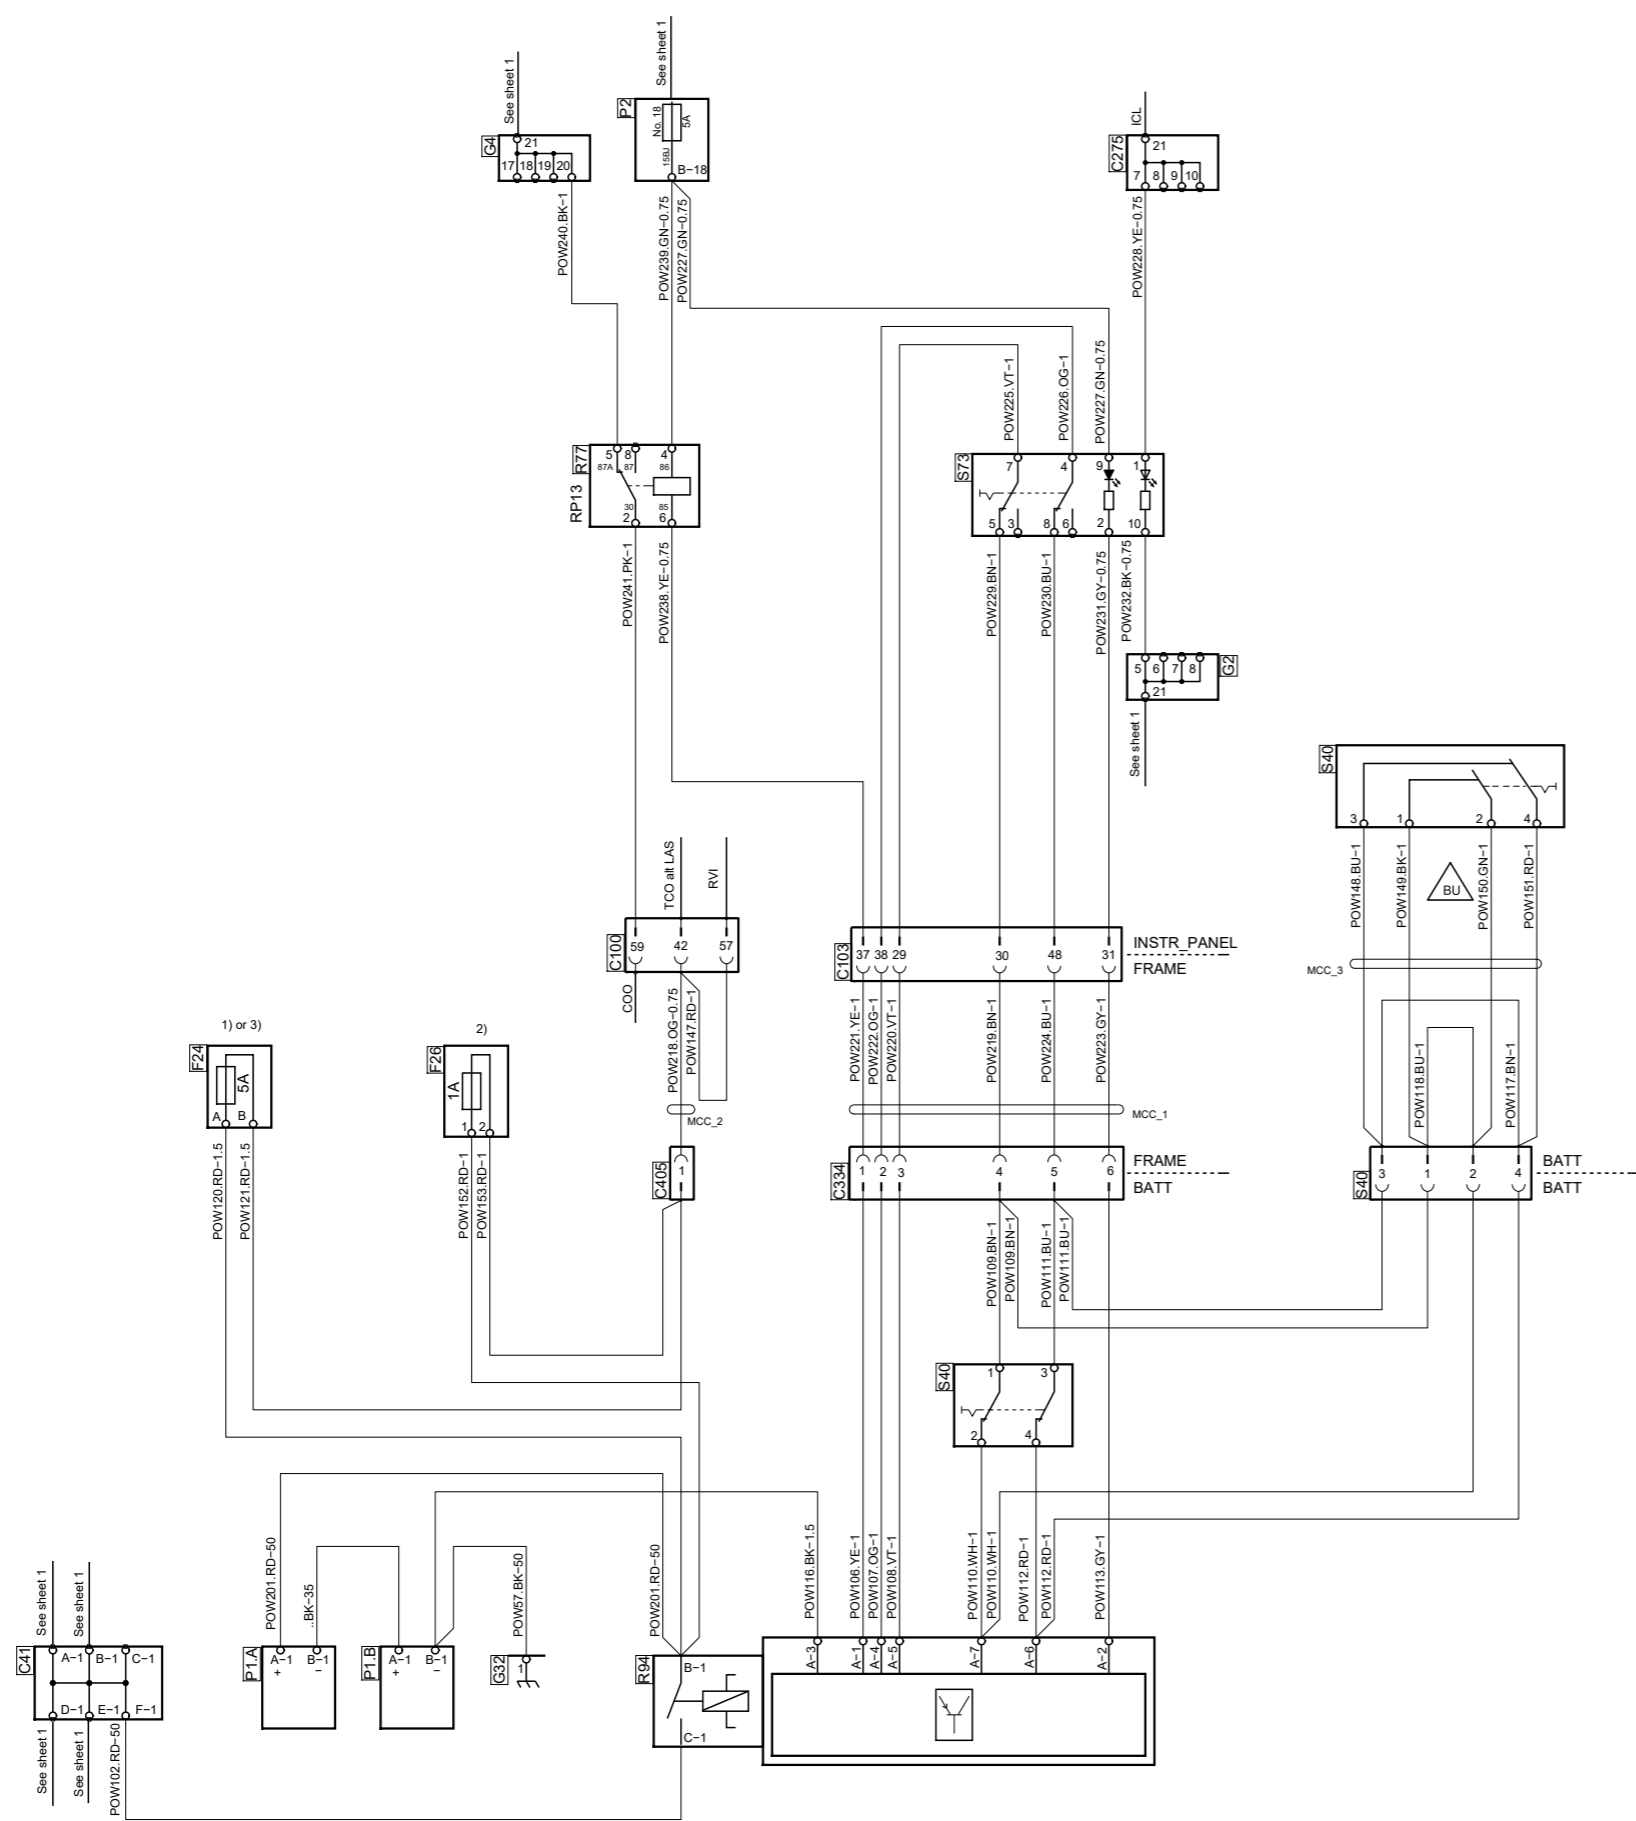


Code	Colour
BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink

Des.	Pos.	Description
C41	B 10	Junction block
C100	E 8	Connector, 66-pole
C103	E 8	Connector, 66-pole
C275	H 6	Joint connector, instr light
C334	D 8	Connector, 6-pole
C405	D 8	Connector, 2-pole
F24	D 10	Fuse
F26	D 9	Fuse
GN	F 6	Joint connector, ground
G4	H 9	Joint connector, ground
G32	B 8	Ground, frame
P1.A	B 10	Battery
P1.B	B 9	Battery
P2	H 8	Central electric unit
R77	G 8	Relay, ADR, instr
R94	B 7	Relay, ADR, battery switch
S40	E 5	Switch, battery master switch safety
S40	C 7	Switch, battery master switch safety
S40	D 6	Switch, battery master switch safety
S73	G 7	Switch, ADR, POW



With battery master switch safety and activity in Cab and Frame
 Battery box position :XM 3260 and XM 5266
 1) with ADR class EX/II or EX/III or AT or OX
 2) with ADR class FL.
 3) without ADR.

SCANIA

Circuit Diagram:

POW

Drawing No.-
Sheet-Rev: 1395800-3-22

N.B. The copyright and ownership of this drawing including associated computer data are and will remain ours. They must not be copied, used or brought to the attention of any third party without prior permission (C) Scania, Sweden