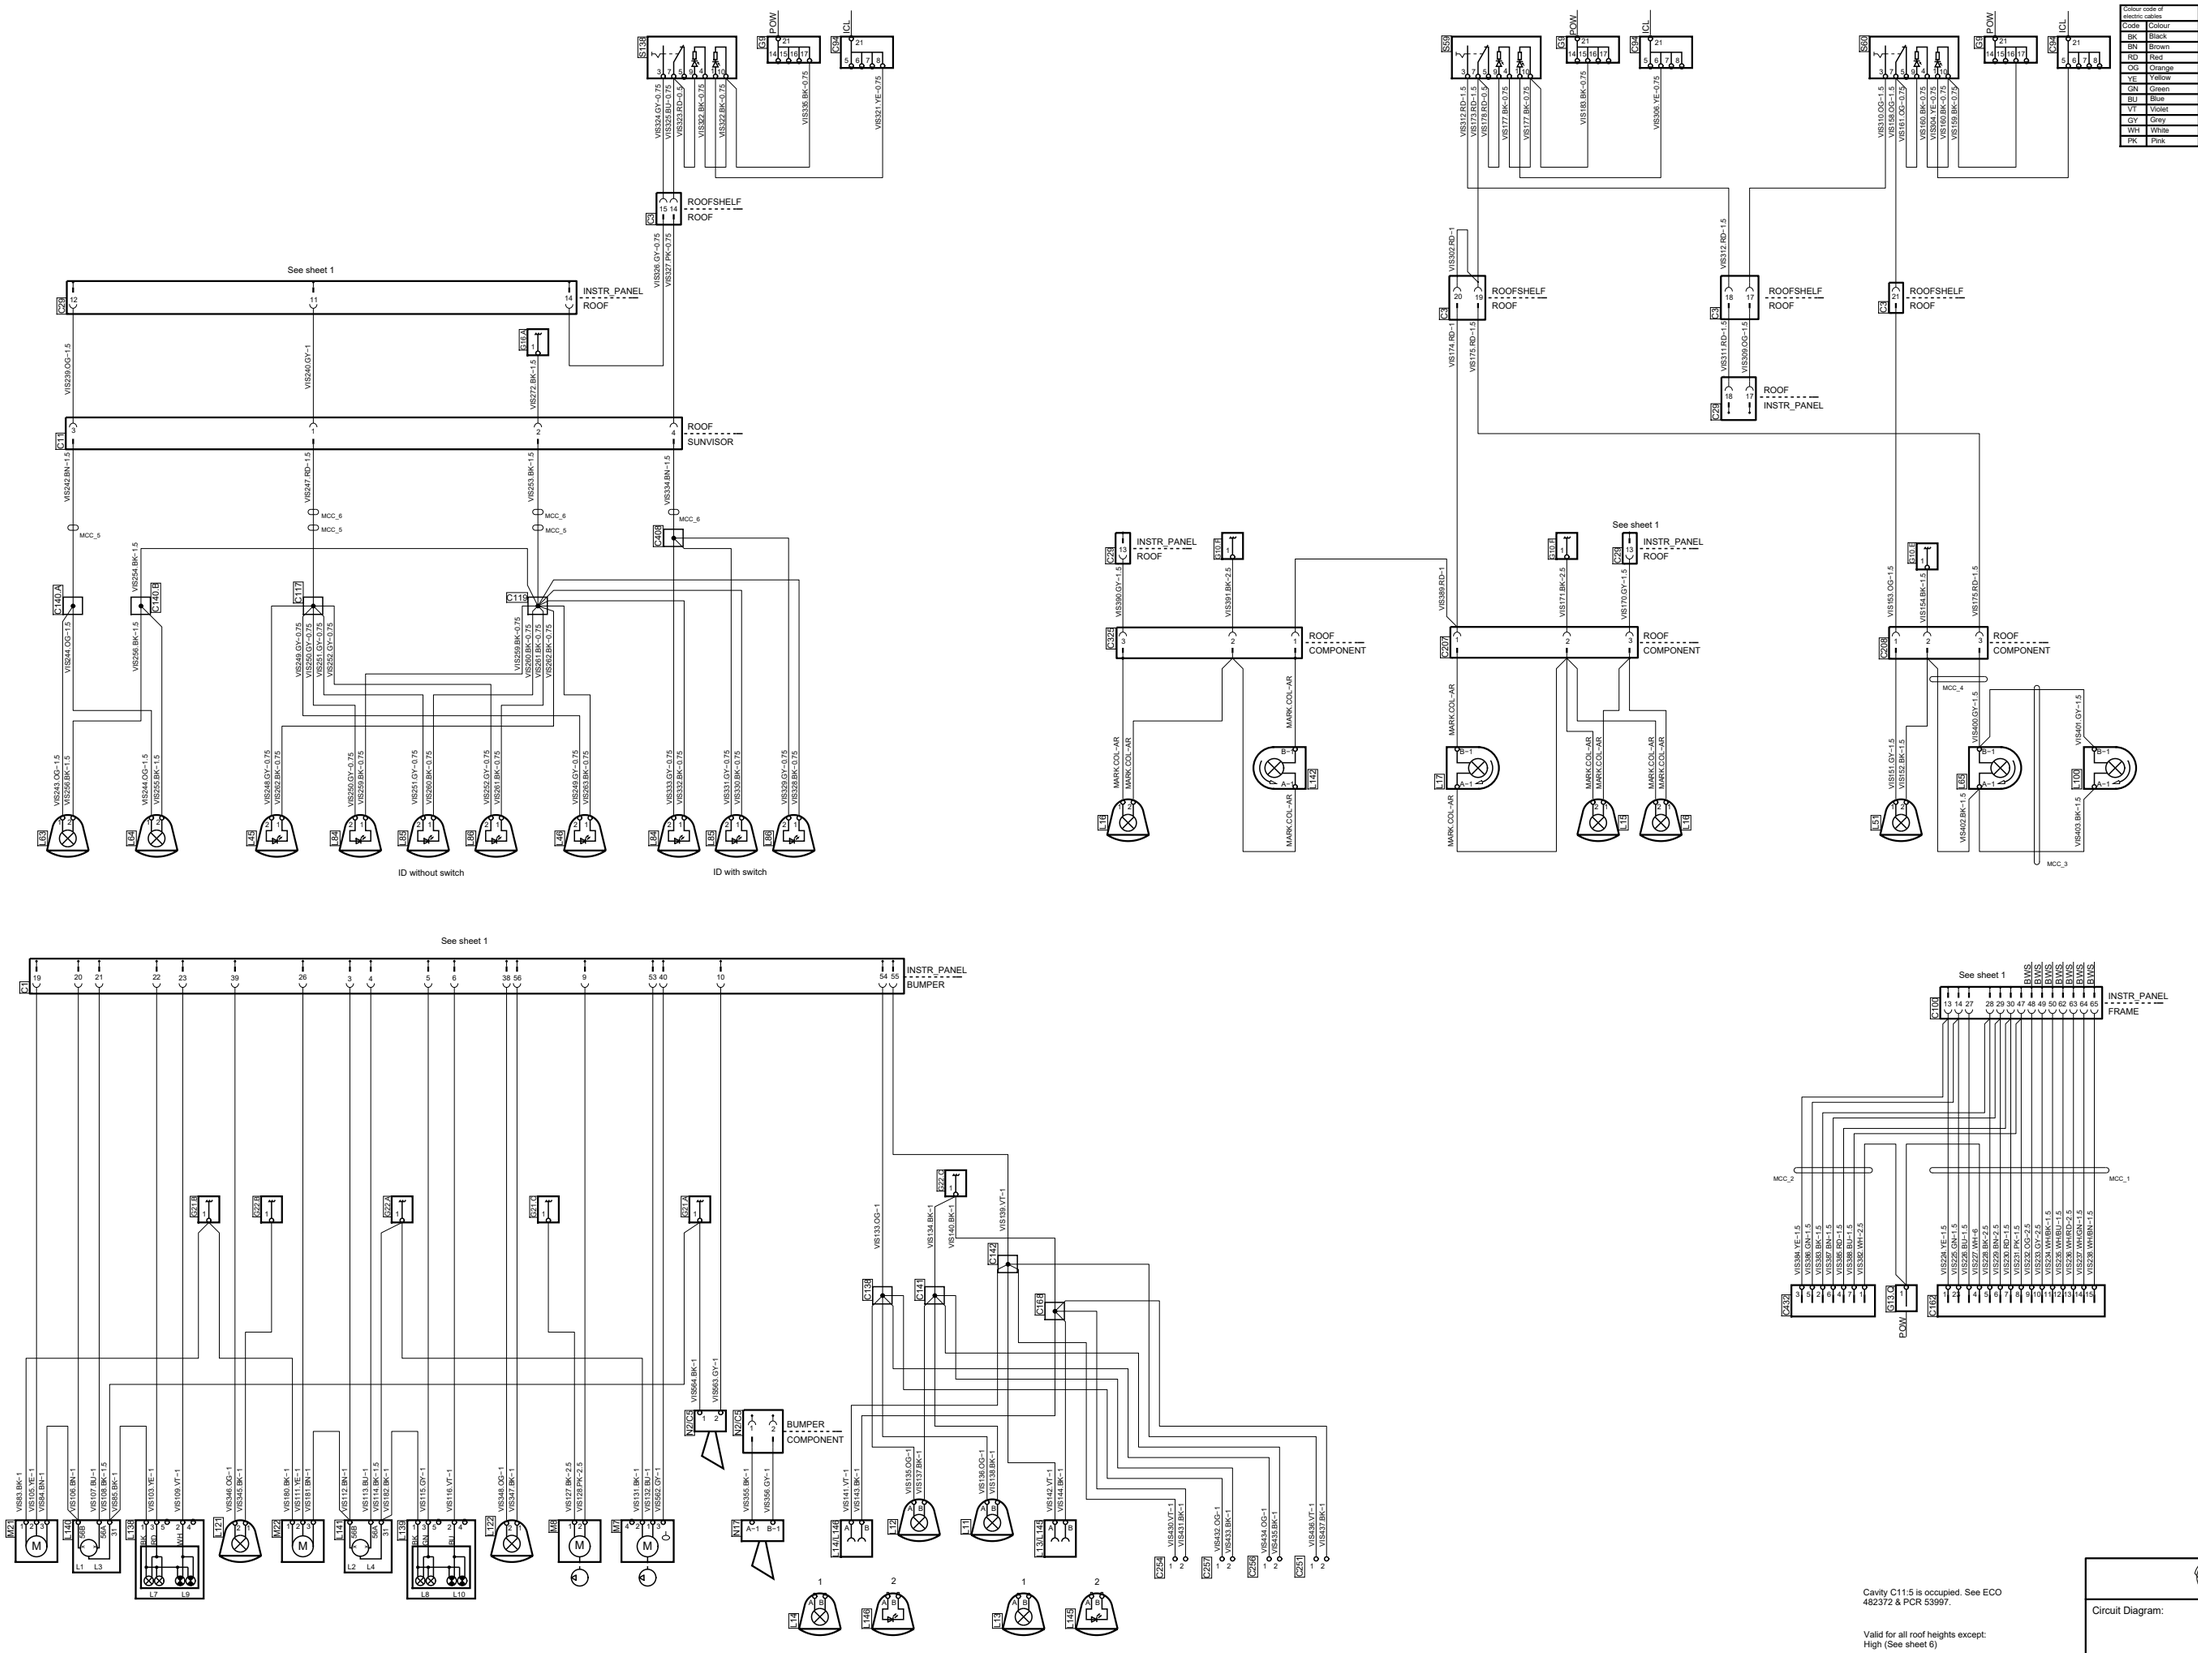

Colour code of electric cables	
Code	Colour
BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink

Des.	Pos.	Description
C1	C 8	Connector, 66–pole
C3	F 6	Connector, 21–pole
C3	E 3	Connector, 21–pole
C3	E 4	Connector, 21–pole
C3	E 2	Connector, 21–pole
C11	E 7	Connector, 5–pole
C29	E 5	Connector 21–pole, Instr–Roof
C29	E 3	Connector 21–pole, Instr–Roof
C29	E 4	Connector 21–pole, Instr–Roof
C29	E 6	Connector 21–pole, Instr–Roof
C29	E 7	Connector 21–pole, Instr–Roof
C29	E 8	Connector 21–pole, Instr–Roof
C94	F 2	Connector, 21–pole
C94	F 3	Connector, 21–pole
C94	F 6	Connector, 21–pole
C100	C 2	Connector, 66–pole
C117	D 7	Splice, survisor, VIS
C119	D 7	Splice, survisor, VIS
C138	B 6	Splice, bumper, VIS
C140.A	D 8	Splice, survisor, VIS
C140.B	D 8	Splice, survisor, VIS
C141	B 5	Splice, survisor, VIS
C142	B 5	Splice, survisor, VIS
C162	B 2	Socket, 15–pole
C168	B 5	Splice, bumper, VIS
C207	D 4	Connector, 5–pole, VIS
C208	D 2	Connector, 5–pole, VIS
C251	A 4	Cut cable, VIS
C254	A 5	Cut cable, VIS
C256	A 4	Cut cable, VIS
C257	A 5	Cut cable, VIS
C325	D 5	Connector, 5–pole
C408	E 6	Splice, survisor, VIS
C432	B 2	Socket, 7–pole, 24N
G9	F 2	Joint connector, ground
G9	F 3	Joint connector, ground
G9	F 6	Joint connector, ground
G10.E	E 2	Ground, roof
G10.F	E 3	Ground, roof
G10.F	E 4	Ground, roof
G13.Q	B 2	Ground, torpedo wall
G16.A	E 7	Ground, roof
G21.A	B 6	Ground, cab front
G21.A	B 8	Ground, cab front
G21.B	B 8	Ground, cab front
G21.C	B 7	Ground, cab front
G22.A	B 7	Ground, cab front
G22.B	B 7	Ground, cab front
G22.C	B 5	Ground, cab front
L11	A 5	Distance light
L12	A 5	Distance light
L13	A 5	Front fog light, left
L13/L145	A 5	Front fog light, left / Daytime runing light, left
L14	A 6	Front fog light, right
L14/L146	A 6	Front fog light, right / Daytime runing light, right
L15	D 3	Work light
L16	D 5	Work light
L16	D 3	Work light
L17	D 4	Rotating beacon
L45	C 7	End out marker light,
L46	C 6	End out marker light,
L51	D 2	Signlamp
L63	C 8	Distance light
L64	C 8	Distance light
L65	D 2	Rotating beacon
L84	C 6	ID–light,
L84	C 7	ID–light,
L85	C 6	ID–light,
L85	C 7	ID–light,
L86	C 6	ID–light,
L86	C 7	ID–light,
L100	D 2	Rotating beacon
L121	A 8	Category six lamp
L122	A 8	Category six lamp
L138	A 8	Dir/Pos lamp, front LH
L139	A 7	Dir/Pos lamp, front RH
L140	A 8	Headlamp, LH
L141	A 7	Headlamp, RH
L142	D 4	Rotating beacon
L145	A 5	Daytime runing light, left
L146	A 6	Daytime runing light, right
M7	A 6	Motor, windscreen washer
M8	A 6	Motor, headlamp washer
M21	A 8	Motor, light level control
M22	A 7	Motor, light level control
N2/C5	A 6	Signal horn, air/ Connector, 2–pole
N2/C5	A 6	Signal horn, air/ Connector, 2–pole
N17	A 6	Signal horn, el
S59	F 3	Switch, rotating beacon
S60	F 2	Switch, roof sign lighting

Cable designation

AWD35 . OG – 1

Cable marking

Cable colour (Orange)

Conductor area (mm²)

Cavity C11:5 is occupied. See ECO 482372 & PCR 53997.

Valid for all roof heights except: High (See sheet 6)

S–order equipment connected: Cir dgm BOL

SCANIA

Circuit Diagram:

VIS

Drawing No.- Sheet-Rev: 1428523-2-36

N.B. The copyright and ownership of this drawing including associated computer data are and will remain ours. They must not be copied, used or brought to the attention of any third party without prior permission (C) Scania, Sweden