


Code	Colour
BR	Brown
BN	Brown
RD	Red
OG	Orange
YL	Yellow
GN	Green
BU	Blue
VT	Violet
LT	Light
WH	White
PK	Pink

Code	Pos	Description
C88	B 4	Connector, 3-pole
C92	B 8	Connector, 8-pole
C100	C 8	Connector, 64-pole
C101	C 7	Connector, 64-pole
C102	C 3	Connector, 64-pole
C275	E 5	Joint connector, instr light
C480	E 7	Joint connector, wake up
C482	E 7	Joint connector, rad CAN
E37	D 2	Control unit, ABS
G13	C 6	Ground, torpedo wall
G13	C 4	Ground, torpedo wall
G13	E 7	Ground, torpedo wall
G13K	F 6	Ground, torpedo wall
G13P	C 8	Ground, torpedo wall
P2	F 7	Central electric unit
S90	F 6	Switch, TC off
T11	B 7	Sensor speed, Front LH
T12	B 7	Sensor speed, Front RH
T13	B 6	Sensor speed, Rear LH
T14	B 5	Sensor speed, Rear RH
T28	B 4	Sensor speed, Add Trch LH
T30	B 3	Sensor speed, Add Trch RH
T36	B 4	Sensor, pressure EBS
V3	B 6	Pressure control valve, Front LH
V4	B 6	Pressure control valve, Front RH
V5	B 5	Pressure control valve, Rear LH
V6	B 5	Pressure control valve, Rear RH
V46	B 3	Pressure control valve, Sch LH
V47	B 3	Pressure control valve, Sch RH
V81	B 5	Solenoid valve, TC

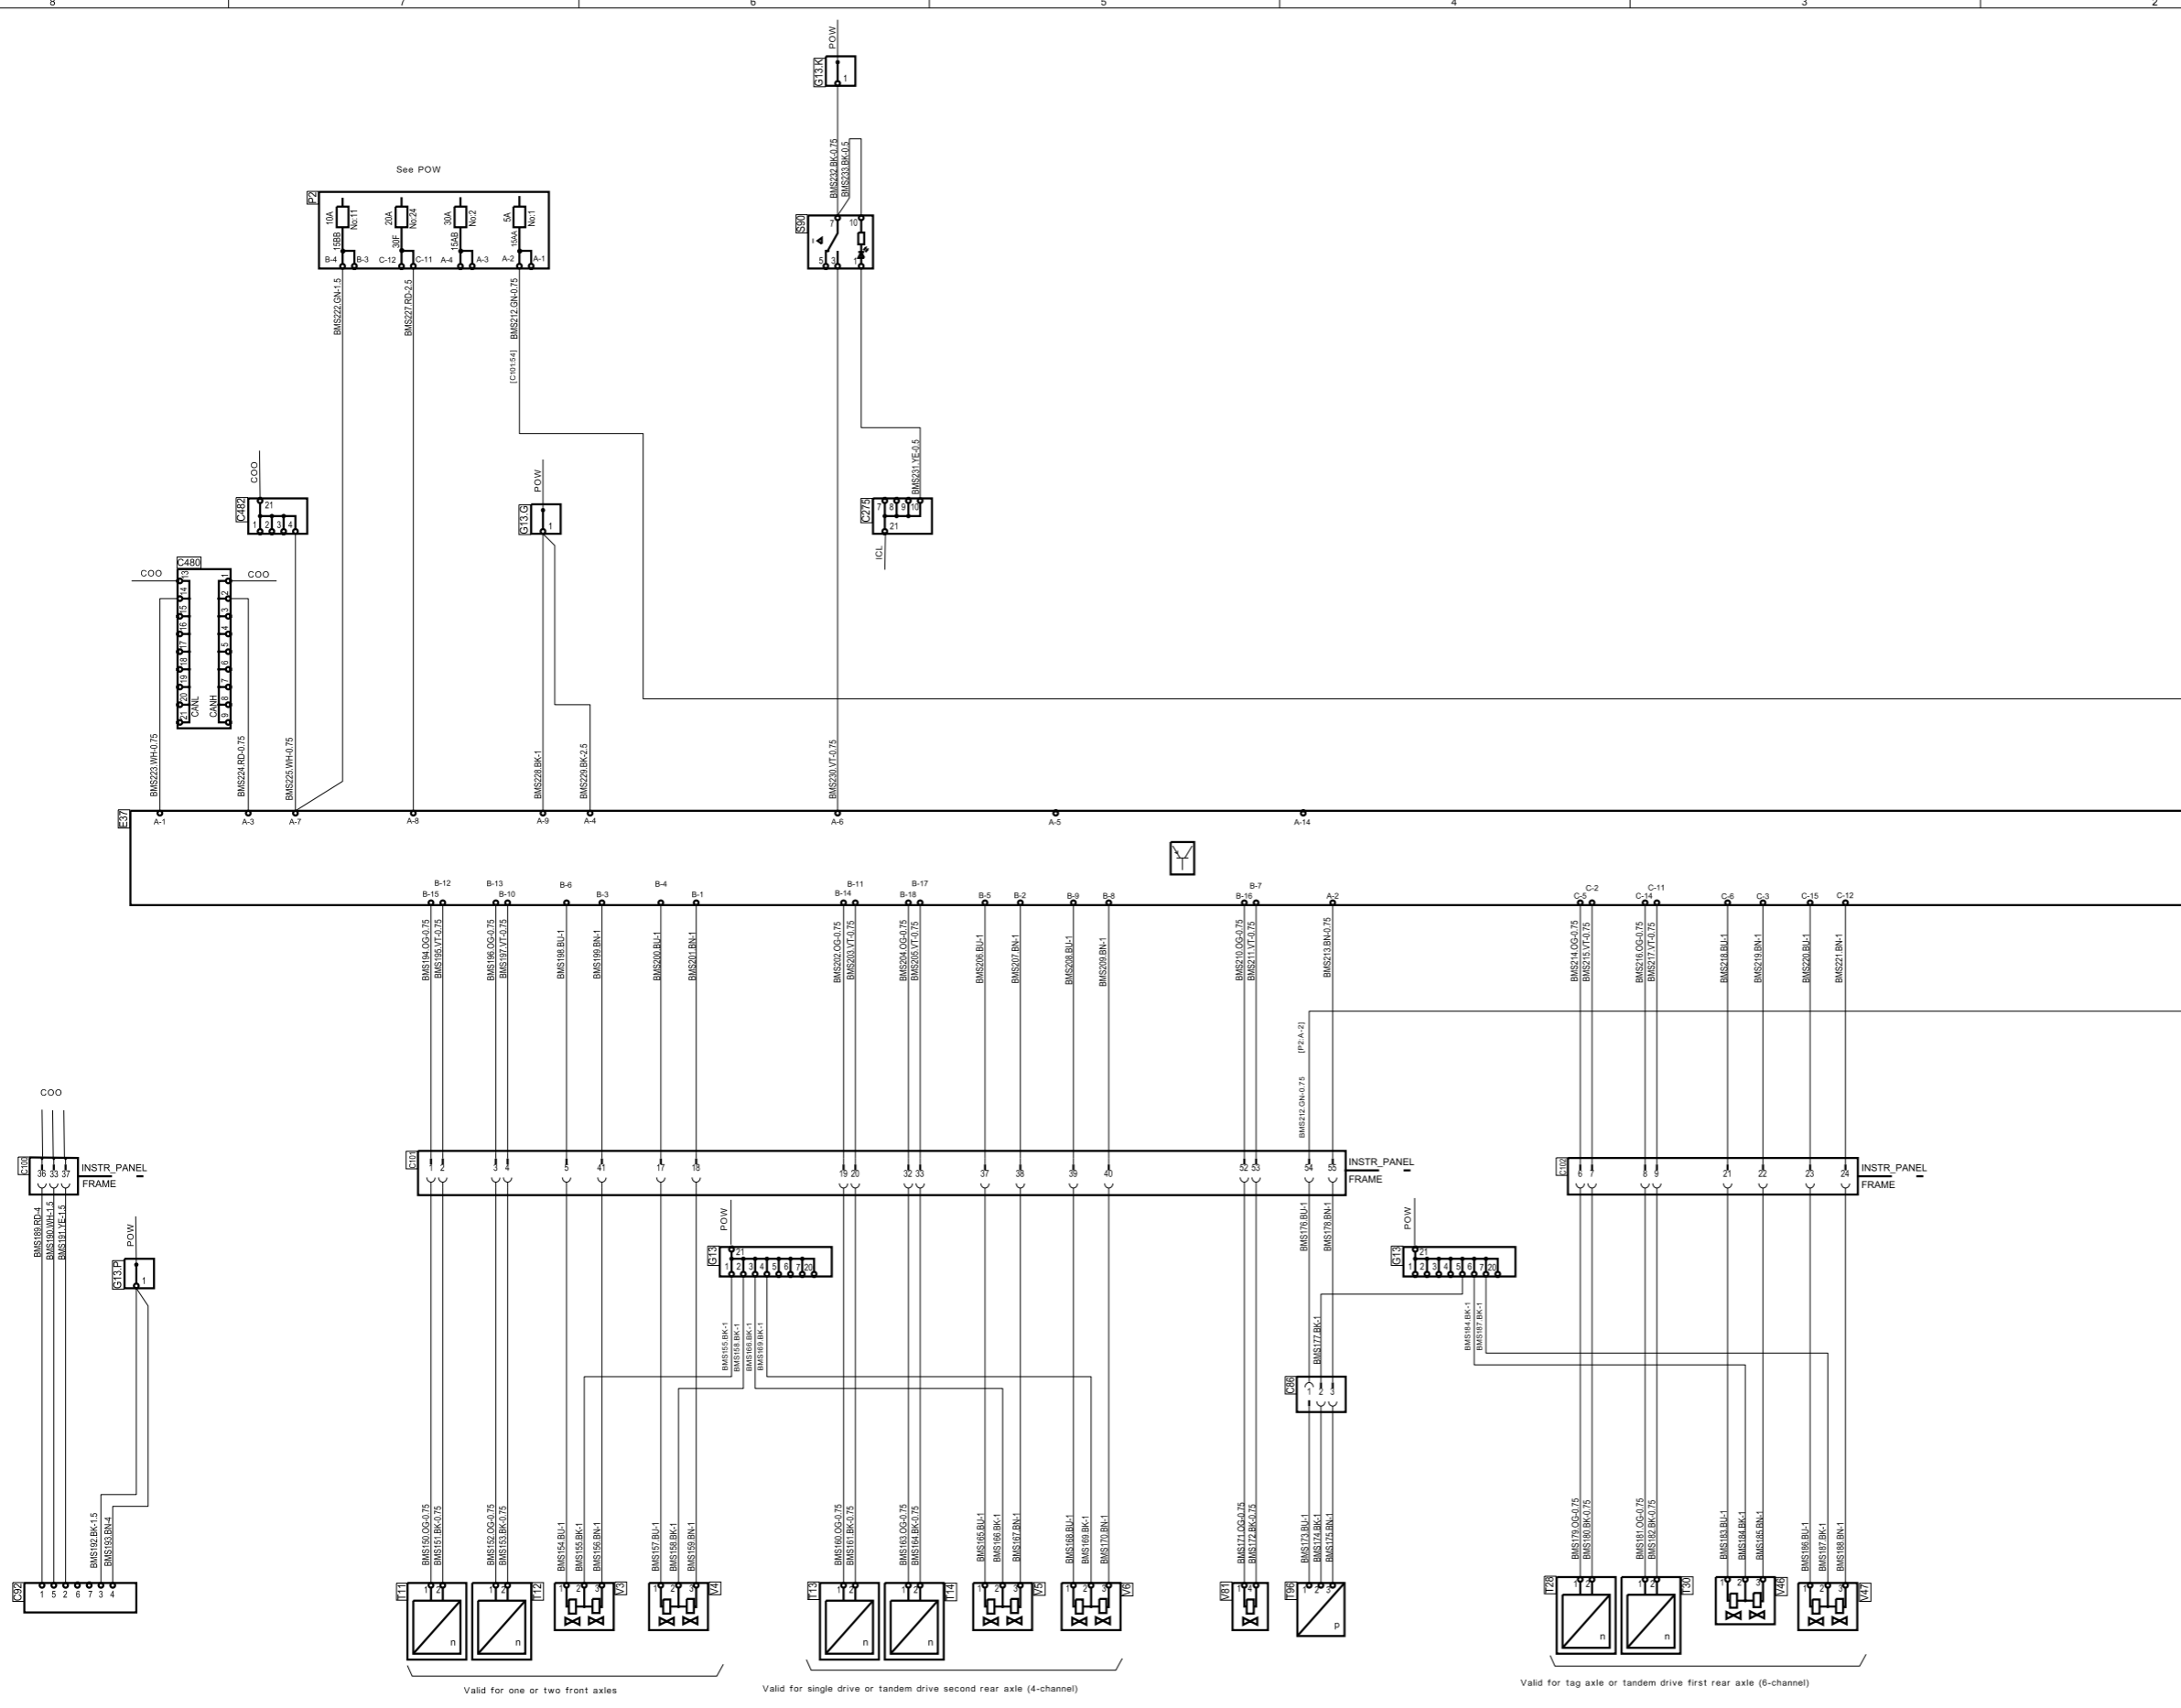

SCANIA

Circuit Diagram:

BMS ABS

Drawing No.- 1474798-1-7
Sheet-Rev:

N.B. The copyright and ownership of this drawing including associated computer data are and will remain ours. They must not be copied, used or brought to the attention of any third party without prior permission (C) Scania, Sweden