
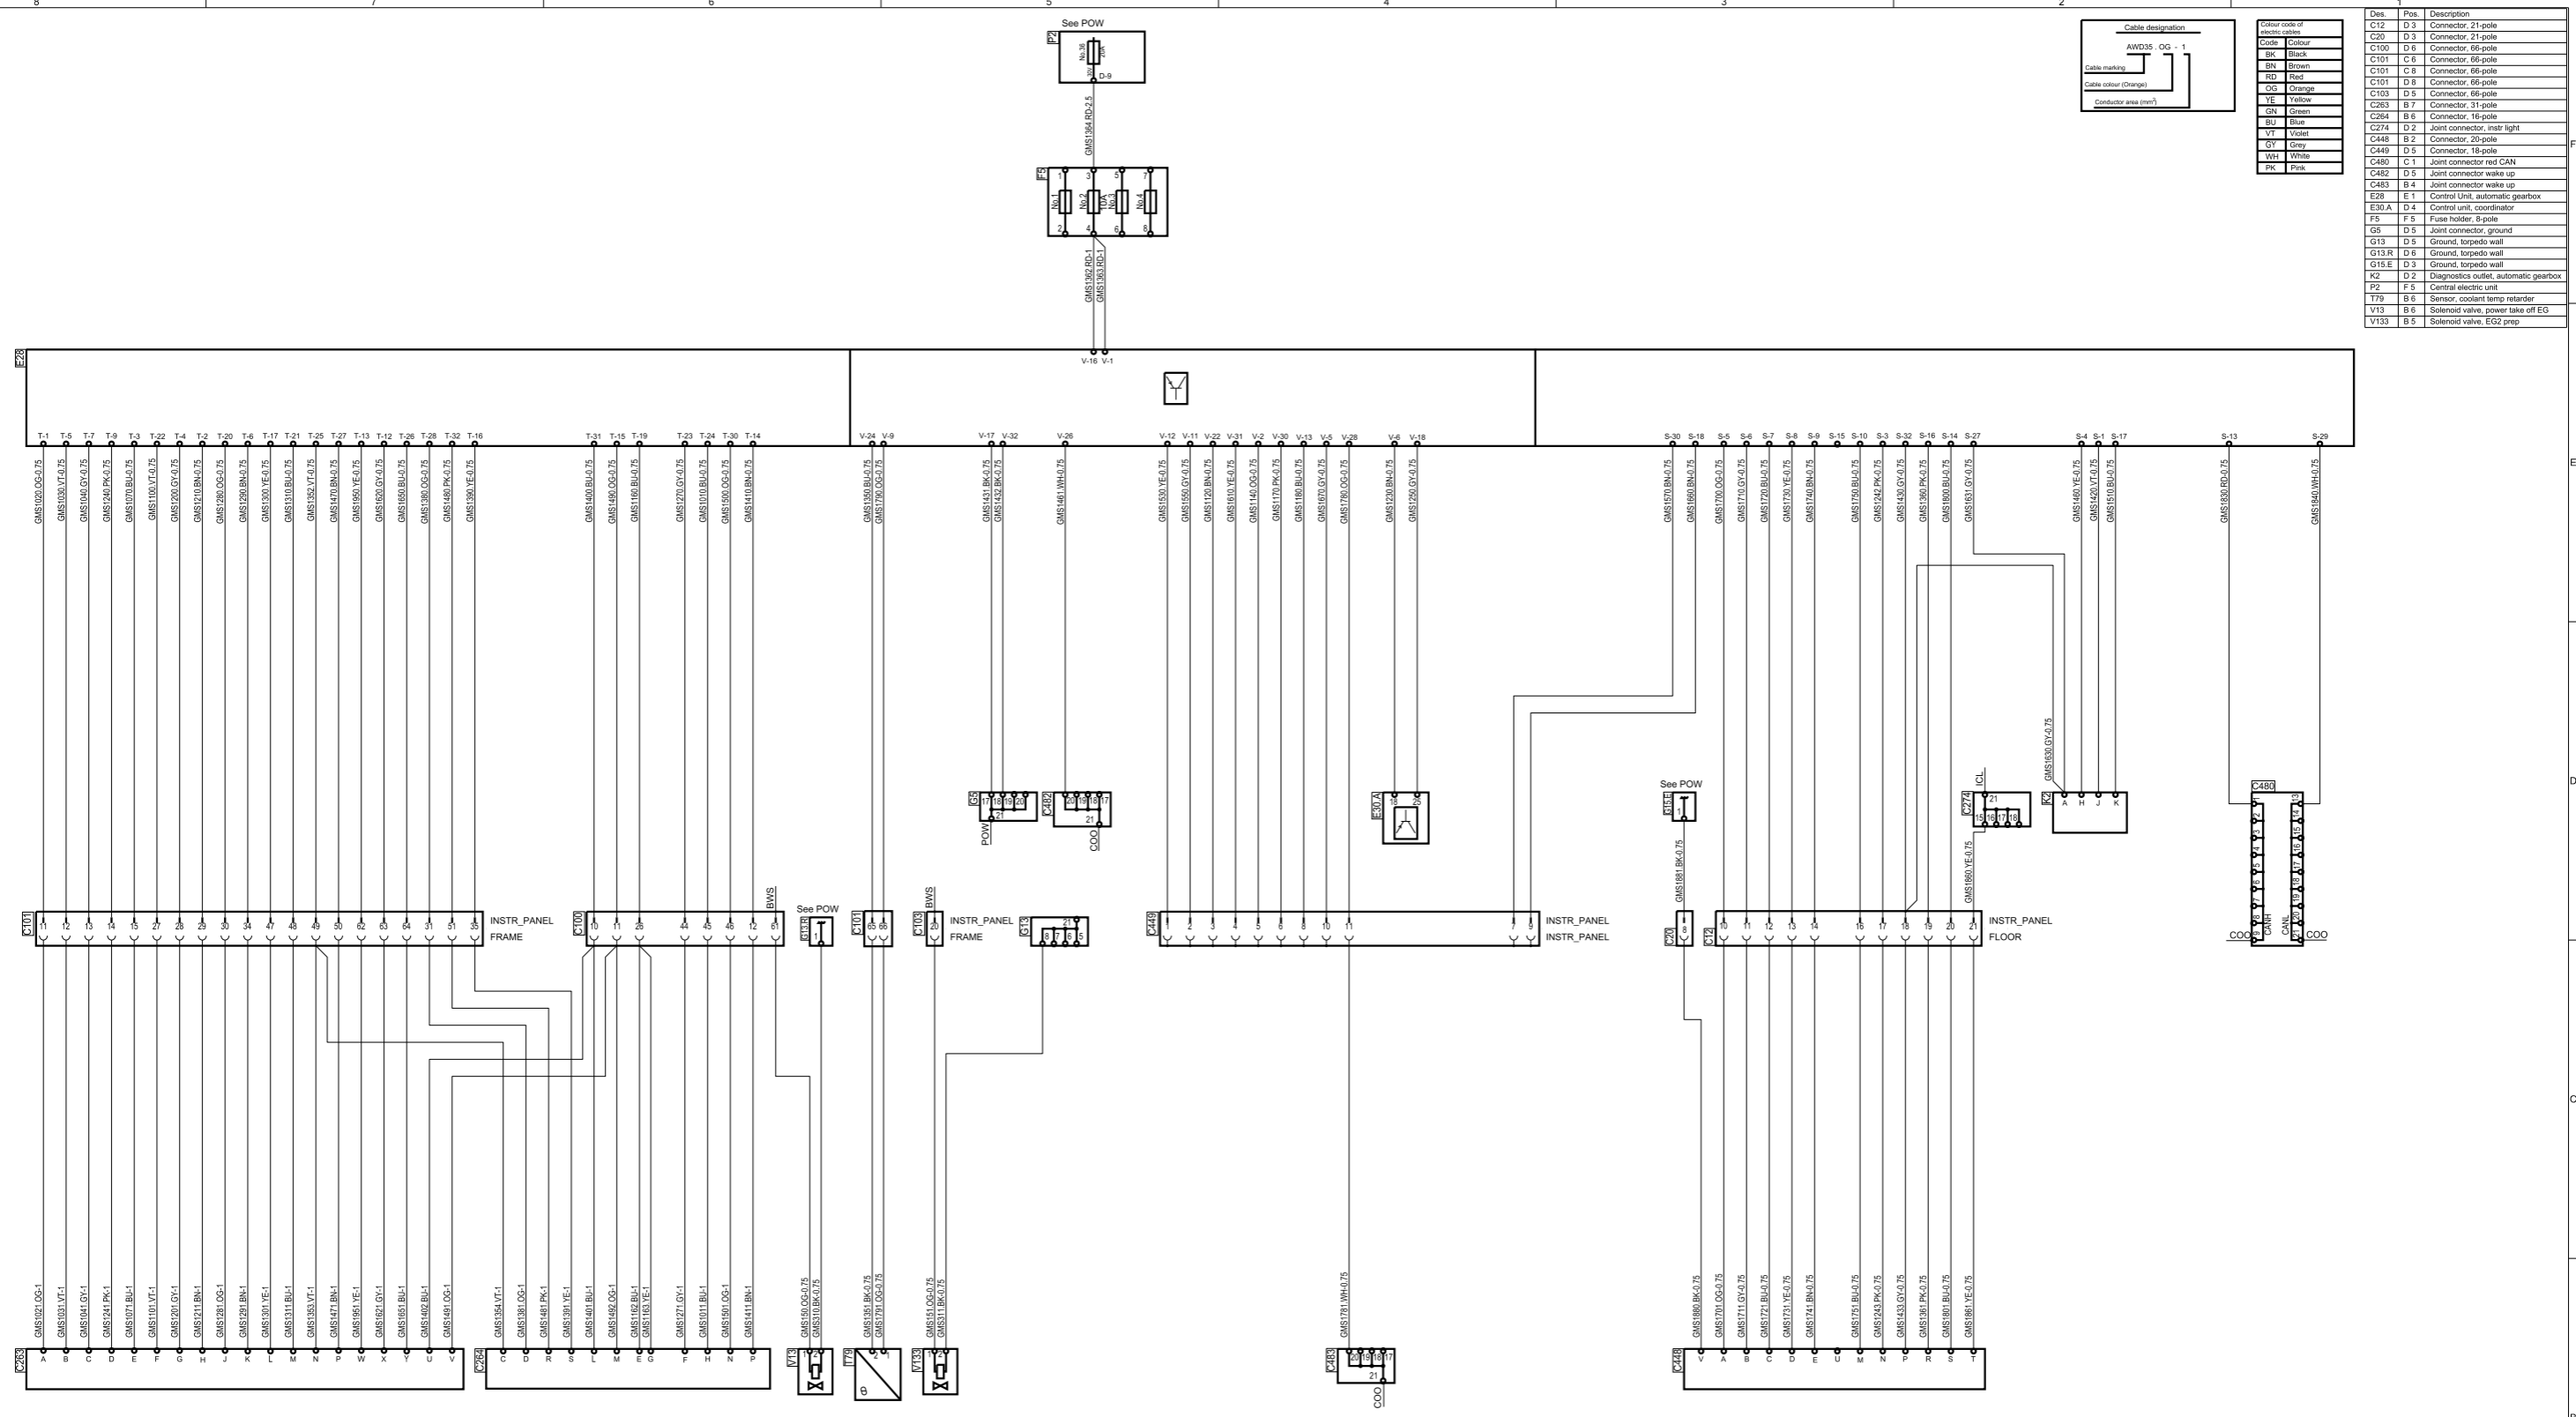


Des.	Pos.	Description
C12	D 3	Connector, 21-pole
C20	D 3	Connector, 21-pole
C100	D 6	Connector, 66-pole
C101	C 6	Connector, 66-pole
C101	C 8	Connector, 66-pole
C101	D 8	Connector, 66-pole
C103	D 5	Connector, 66-pole
C263	B 7	Connector, 31-pole
C284	B 6	Connector, 16-pole
C274	D 2	Joint connector, instr light
C448	B 2	Connector, 29-pole
C449	D 5	Connector, 18-pole
C480	C 1	Joint connector red CAN
C482	D 5	Joint connector wake up
C483	B 4	Joint connector wake up
E28	E 1	Control unit, automatic gearbox
E30A	D 4	Control unit, coordinator
F5	F 5	Fuse holder, 8-pole
G5	D 5	Joint connector, ground
G13	D 5	Ground, torpedo wall
G13.R	D 6	Ground, torpedo wall
G15.E	D 3	Ground, torpedo wall
K2	D 2	Diagnosis outlet, automatic gearbox
P2	F 5	Central electric unit
T79	B 6	Sensor, coolant temp retarder
V13	B 6	Solenoid valve, power take off EG
V133	B 5	Solenoid valve, EG2 prep

Colour code of electric cables	Code	Colour
BR	Black	Black
BR	Brown	Brown
RD	Red	Red
OG	Orange	Orange
YE	Yellow	Yellow
GR	Green	Green
BU	Blue	Blue
VT	Violet	Violet
GY	Grey	Grey
WH	White	White
PK	Pink	Pink



Circuit Diagram:

GMS GA

Drawing No. 1499636-1-10
Sheet-Rev:

N.B. The copyright and ownership of this drawing including associated computer data are and will remain ours. They must not be copied, used or brought to the attention of any third party without prior permission (C) Scania, Sweden

STD 4247