


| Colour code of electric cables | |
|--------------------------------|--------|
| Code | Colour |
| BK | Black |
| BN | Brown |
| RD | Red |
| OG | Orange |
| YE | Yellow |
| GN | Green |
| BU | Blue |
| VT | Violet |
| GY | Grey |
| WH | White |
| PK | Pink |

| Des. | Pos. | Description |
|--------|------|-----------------------------------|
| C452-1 | C 2 | Splice, oil protection |
| C452-2 | C 3 | Splice, oil protection |
| C453-1 | C 4 | Splice, oil protection |
| C453-2 | C 4 | Splice, oil protection |
| C456-1 | C 4 | Splice, oil protection |
| C456-2 | C 4 | Splice, oil protection |
| C457-1 | C 3 | Splice, oil protection |
| C457-2 | C 3 | Splice, oil protection |
| C458-1 | C 3 | Splice, oil protection |
| C458-2 | C 3 | Splice, oil protection |
| C459-1 | C 3 | Splice, oil protection |
| C459-2 | C 4 | Splice, oil protection |
| E44 | B 2 | Control unit, EMS |
| T111 | C 6 | Sensor, pressure, rail |
| T121 | C 5 | Sensor, charger temp |
| T122 | C 5 | Sensor, charger pressure |
| T125 | C 5 | Sensor, exhaust manifold pressure |
| V141 | C 3 | Solenoid valve, fuel actuator |
| V142 | C 3 | Solenoid valve, fuel actuator |
| V143 | C 2 | Solenoid valve, fuel actuator |
| V144 | C 4 | Solenoid valve, fuel actuator |
| V145 | C 4 | Solenoid valve, fuel actuator |
| V146 | C 3 | Solenoid valve, fuel actuator |

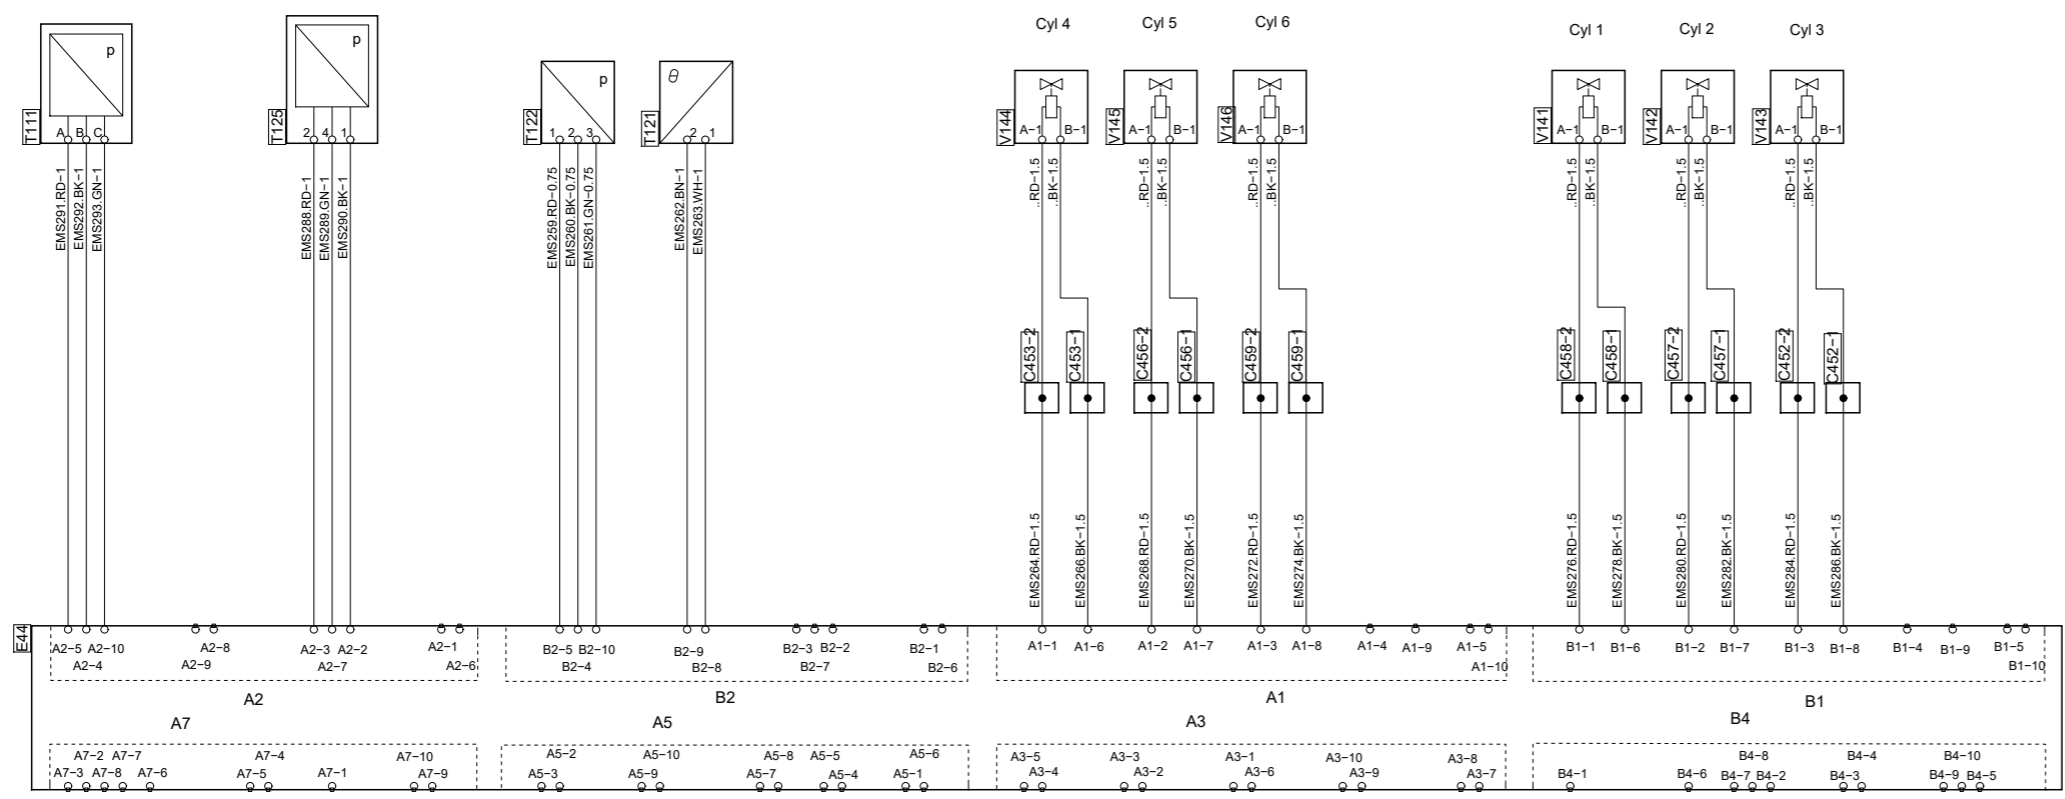

XPI injection 6-cyl

SCANIA

Circuit Diagram:

EMS S7, 5/6-cyl

Drawing No.-
Sheet-Rev: **1529382-2-11**

N.B. The copyright and ownership of this drawing including associated computer data are and will remain ours. They must not be copied, used or brought to the attention of any third party without prior permission (C) Scania, Sweden