Des.	Pos.	Description
C500	F 3	Connector 21 Pole, instrument lights
C502	E 4	Connector 21 Pole, power supply switches
C602	E 5	Connector 21 Pole Visibility
C693	B 4	Connector 12 Pole External lights front
C694	B 3	Connector, 6 pole, Windscreen wiper/Horn
C695	C 7	Connector 15 pole, External lights rear
C795	A 7	Connector, 7–pole, Body builders rear lights
C822	B 7	Connector, 21–pole
C895	B 7	Connector, 9–pole
E32	D 2	Control unit, CUV
G500	F 4	Join Connector 21 pole Grounding Instrument Panel
P2	E 5	Central electric unit
R8	E 6	Relay, Brake lights
R19	E 6	Relay, Alternator current (61)
R21	E 6	Relay, Position lights (58)
R24	E 6	Relay, Reversing lights
R511	E 6	Relay, Emergency switch (ECE36)
S139	E 5	Switch, lighting
S141	E 2	Switch, multi function
S505	E 4	Switch, Fog lights rear
S513	E 4	Switch, Fog lights front
S565	E 3	Switch, Extra distance lights

Cable designation

AWD35 . OG – 1

Cable marking

Cable colour (Orange)

Conductor area (mm²)

Colour code of electric cables	
Code	Colour
BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink

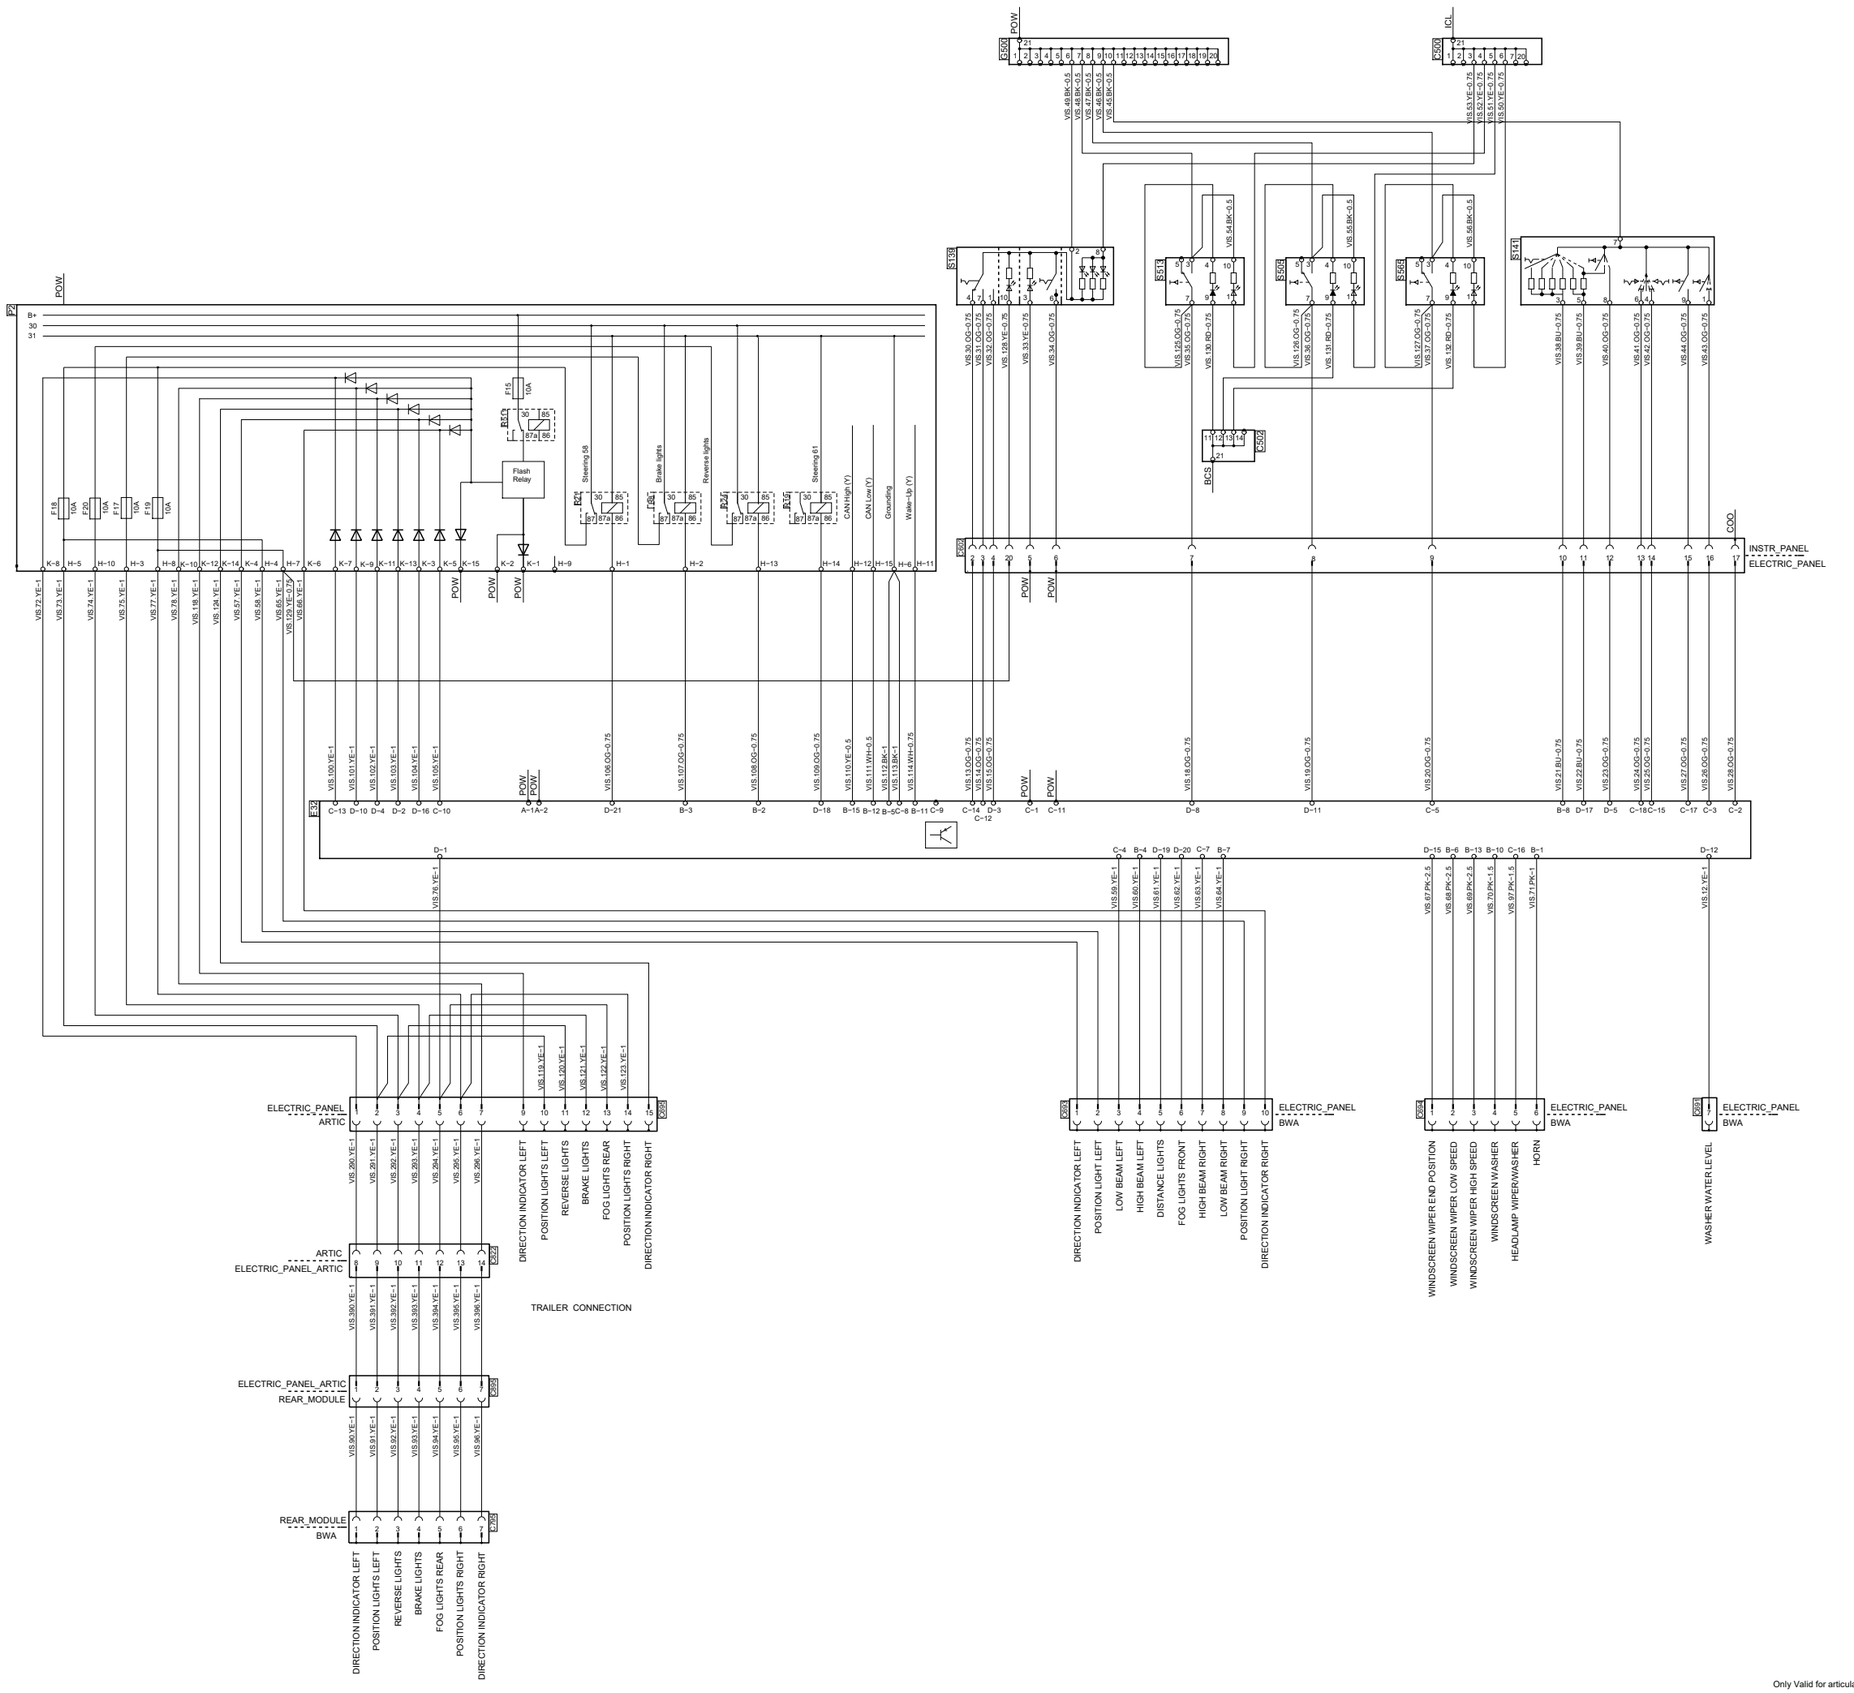

Only Valid for articulated chassis

SCANIA

Circuit Diagram:

VIS

Drawing No.-Sheet-Rev: 1790755-2-3

N.B. The copyright and ownership of this drawing including associated computer data are and will remain ours. They must not be copied, used or brought to the attention of any third party without prior permission (C) Scania, Sweden