


Des.	Pos.	Description
C100	A 4	Connector, 66-pole
C272	C 6	Connector, 21-pole
C447	C 3	Connector, 6-pole, SMS/BWS
E30	B 4	Control unit, coordinator
E53	C 4	Signal amplifier
G5	C 4	Joint connector, ground
G9	D 5	Joint connector, ground
O4	D 4	Tachograph
P2	A 5	Central electric unit

Colour code of electric cables	
Code	Colour
BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink

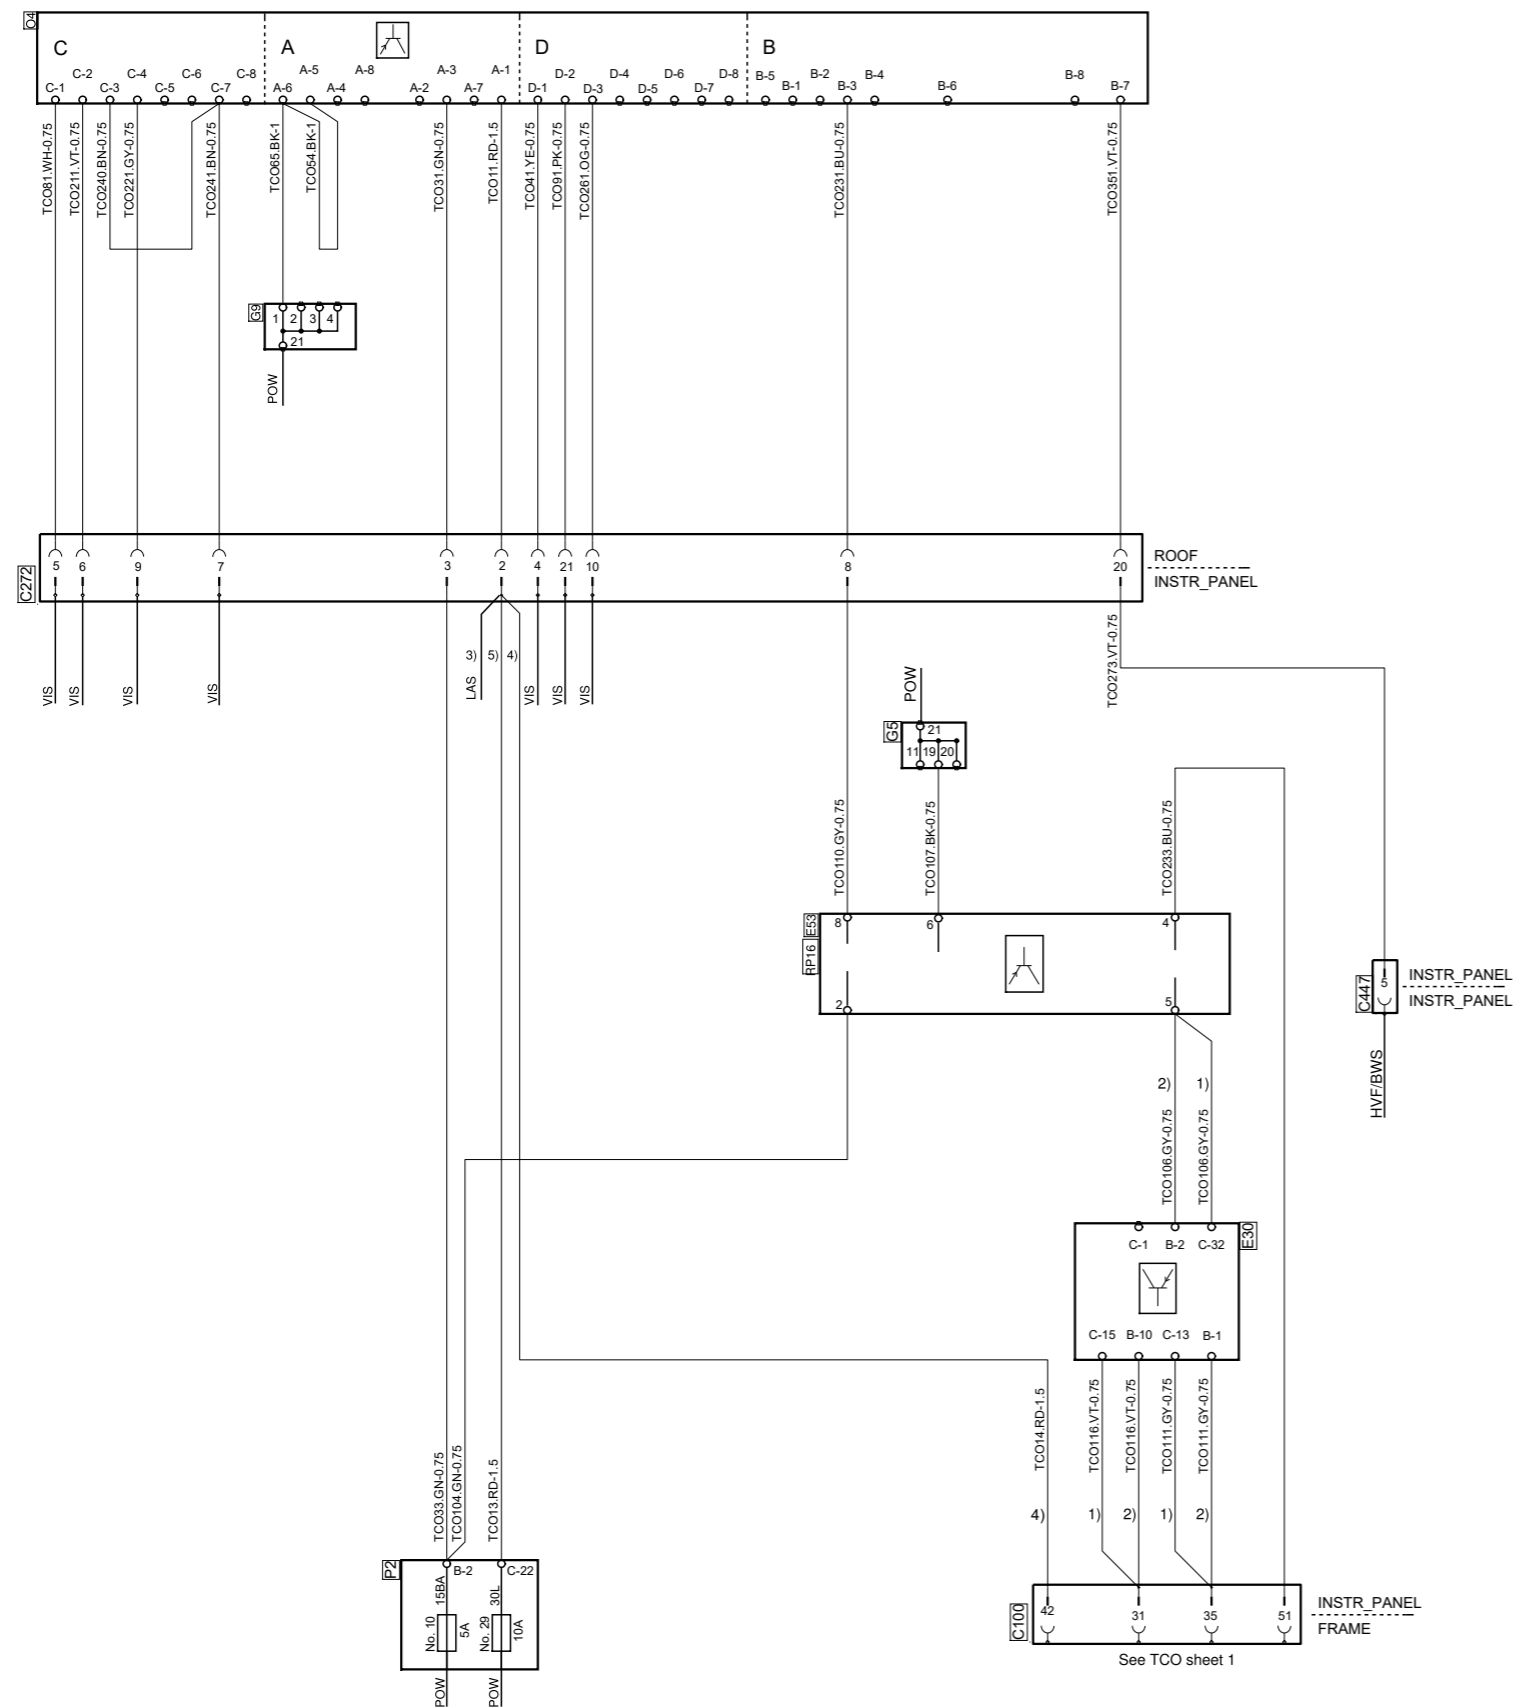

- Notes:
- a) Roof harness valid only for Roof height high and Tachograph digital China
 - b) For roof harness Roof height Low, Normal and High (Topline) and Tachograph digital China see sheet 7.
 - c) For roof harness Roof height Low, Normal and High (Topline) and Tachograph digital Korea see sheet 10.
 - d) For roof harness Roof height high and Tachograph digital Korea see sheet 11.

- Notes:
- 1) With COO6
 - 2) With COO7
 - 3) LAS with Battery master switch and ADR designation EX/II or EX/III or AT or OX or without.
 - 4) With Battery master switch or LAS with battery master switch and ADR designation FL
 - 5) Without Battery master switch

S-order equipment connected:
Cable h TCO 8x8 Frame

Tachograph digital China
Tachograph digital Korea

SCANIA

Circuit Diagram:

TCO

Drawing No.-
Sheet-Rev: **1852759-8-3**

N.B. The copyright and ownership of this drawing including associated computer data are and will remain ours. They must not be copied, used or brought to the attention of any third party without prior permission (C) Scania, Sweden