


Code	Colour
BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink

Des.	Pos.	Description
C4	B7	Connector, 12-pole
C6	B8	Connector, 12-pole
C69	F5	Connector, 21-pole, instr p/front
C103	E7	Connector, 66-pole
C275	E5	Joint connector, instr light
C427	E6	Connector, 21-pole
C309	E3	Connector, 12-pole
E30.C	F5	Control unit, coordinator
E44	E6	Control unit, EMS
E67	D1	Control unit, EEC
E67	D4	Control unit, EEC
E67	D3	Control unit, EEC
G2	E4	Joint connector, ground
G13.T	E8	Ground, torpedo wall
G13.T	E7	Ground, torpedo wall
P2	F7	Central electric unit
S178	F5	Switch, Regen. part. filter
T115	A5	Sensor, nox - Downstream
T115	A6	Sensor, nox - Downstream
T131	A6	Sensor, nox - Upstream
T141	A7	Sensor, pressure
T141	A7	Sensor, pressure
T158	A5	Sensor, temp
V117	A8	Dosing unit
V118	C4	Water valve, EEC
V184	F3	Shut-off unit, fuel and air
V185	F4	Inject valve

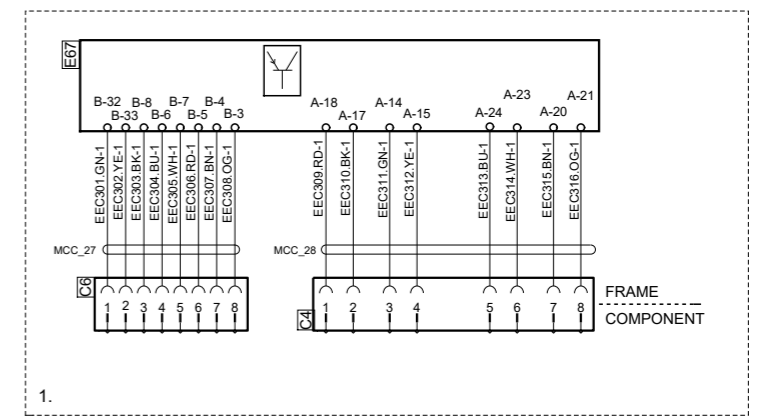

Valid for Crew Cab

Valid for all cabs except Crew Cab

Valid for all cab lengths except: Cab length 16 with vertical outlet

Valid for Cab Length 16 with vertical outlet

1. Alternative MCC for ADR harnesses
2. D16 Engines

Euro6 Inline engines
Frame mounted Control Unit

SCANIA

Circuit Diagram:

EEC

Drawing No.-
Sheet-Rev: **1926090-3-14**

N.B. The copyright and ownership of this drawing including associated computer data are and will remain ours. They must not be copied, used or brought to the attention of any third party without prior permission (C) Scania, Sweden