



Des.	Pos.	Description
C802	C 6	Connector, 62 pole
C829	E 6	Joint Connector, 21-pole SUB CAN CMS
E18	D 3	Control unit, SMS
P8	F 6	Central electric unit, chassis
P20	F 7	Central electric unit
T70	B 4	Sensor, pressure, rear left
T72	B 6	Sensor, distance, front
T73	B 5	Sensor, distance, rear left
T97	B 4	Sensor, distance, rear right
T98	B 4	Sensor, pressure, rear right
T99	B 5	Sensor, pressure, front
T759	B 3	Sensor, pressure Tag axle left
T760	B 3	Sensor, pressure Tag axle right
V523	B 6	Solenoid Valve, Front Axle up/down
V524	B 5	Solenoid Valve, Driven Axle
V525	B 3	Solenoid Valve Tag Axle up/down
V526	B 6	Solenoid Valve, Front Axle Kneeling



Colour code of electric cables	
Code	Colour
BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink

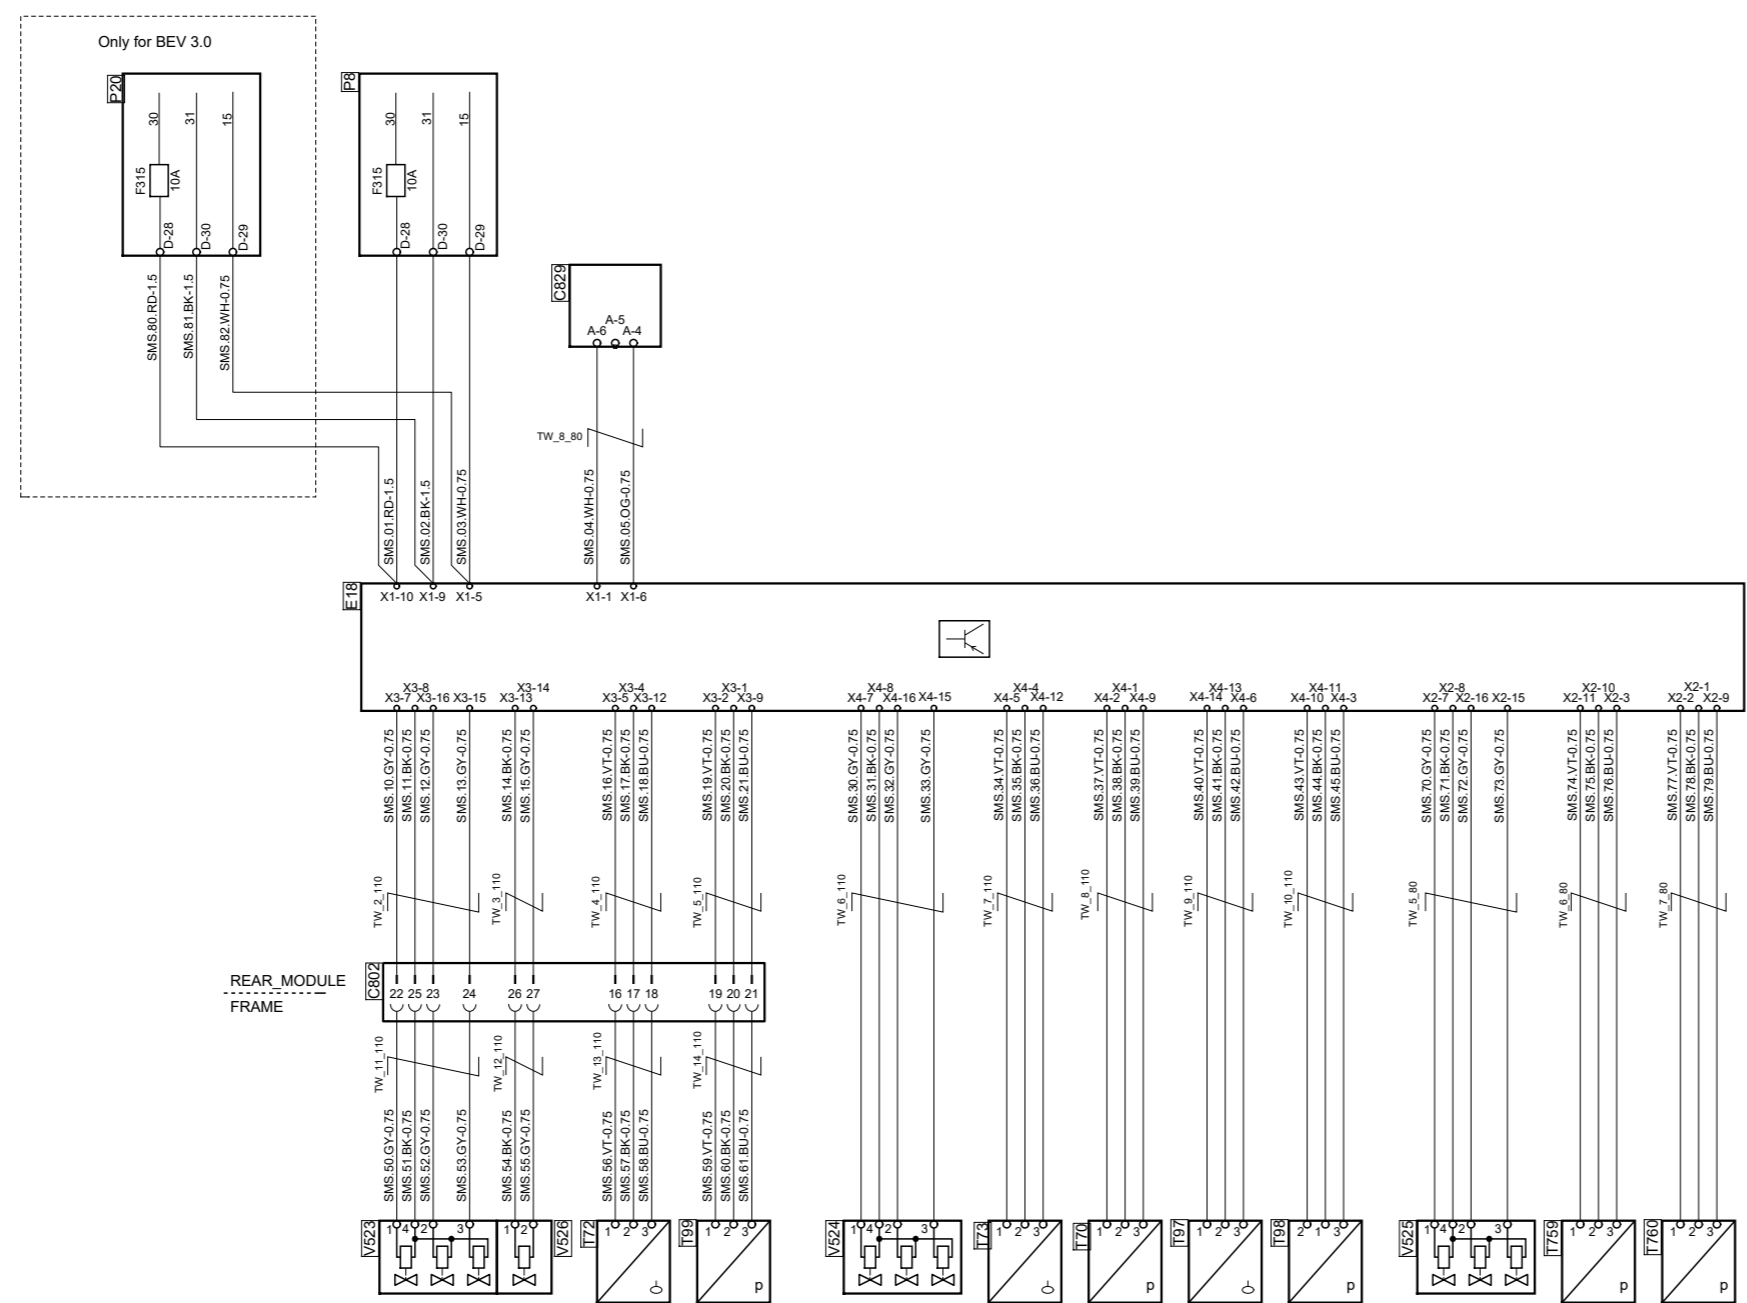

Circuit Diagram:

SMS ELC4

Drawing No.- 2275948-1-9
Sheet-Rev:

N.B. The copyright and ownership of this drawing including associated computer data are and will remain ours. They must not be copied, used or brought to the attention of any third party without prior permission (C) Scania, Sweden