



Des.	Pos.	Description
C722	C 8	Joint connector, Orange CAN
C747	E 5	Splice, Fire alarm
C748	D 5	Splice, Fire alarm
C796	C 7	Connector, 2-pole, Engine compartment light
C797	D 5	Connector, 2-pole, Fire alarm
C803	C 6	Connector, 62 pole
E113	B 4	Control unit, CMS
P20	E 7	Central electric unit
S555	D 7	Switch, Engine compartment light
T563	D 4	Sensor/Monitor, low brake pressure third axle
T763	E 5	Monitor, Fire alarm



Colour code of electric cables	
Code	Colour
BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink

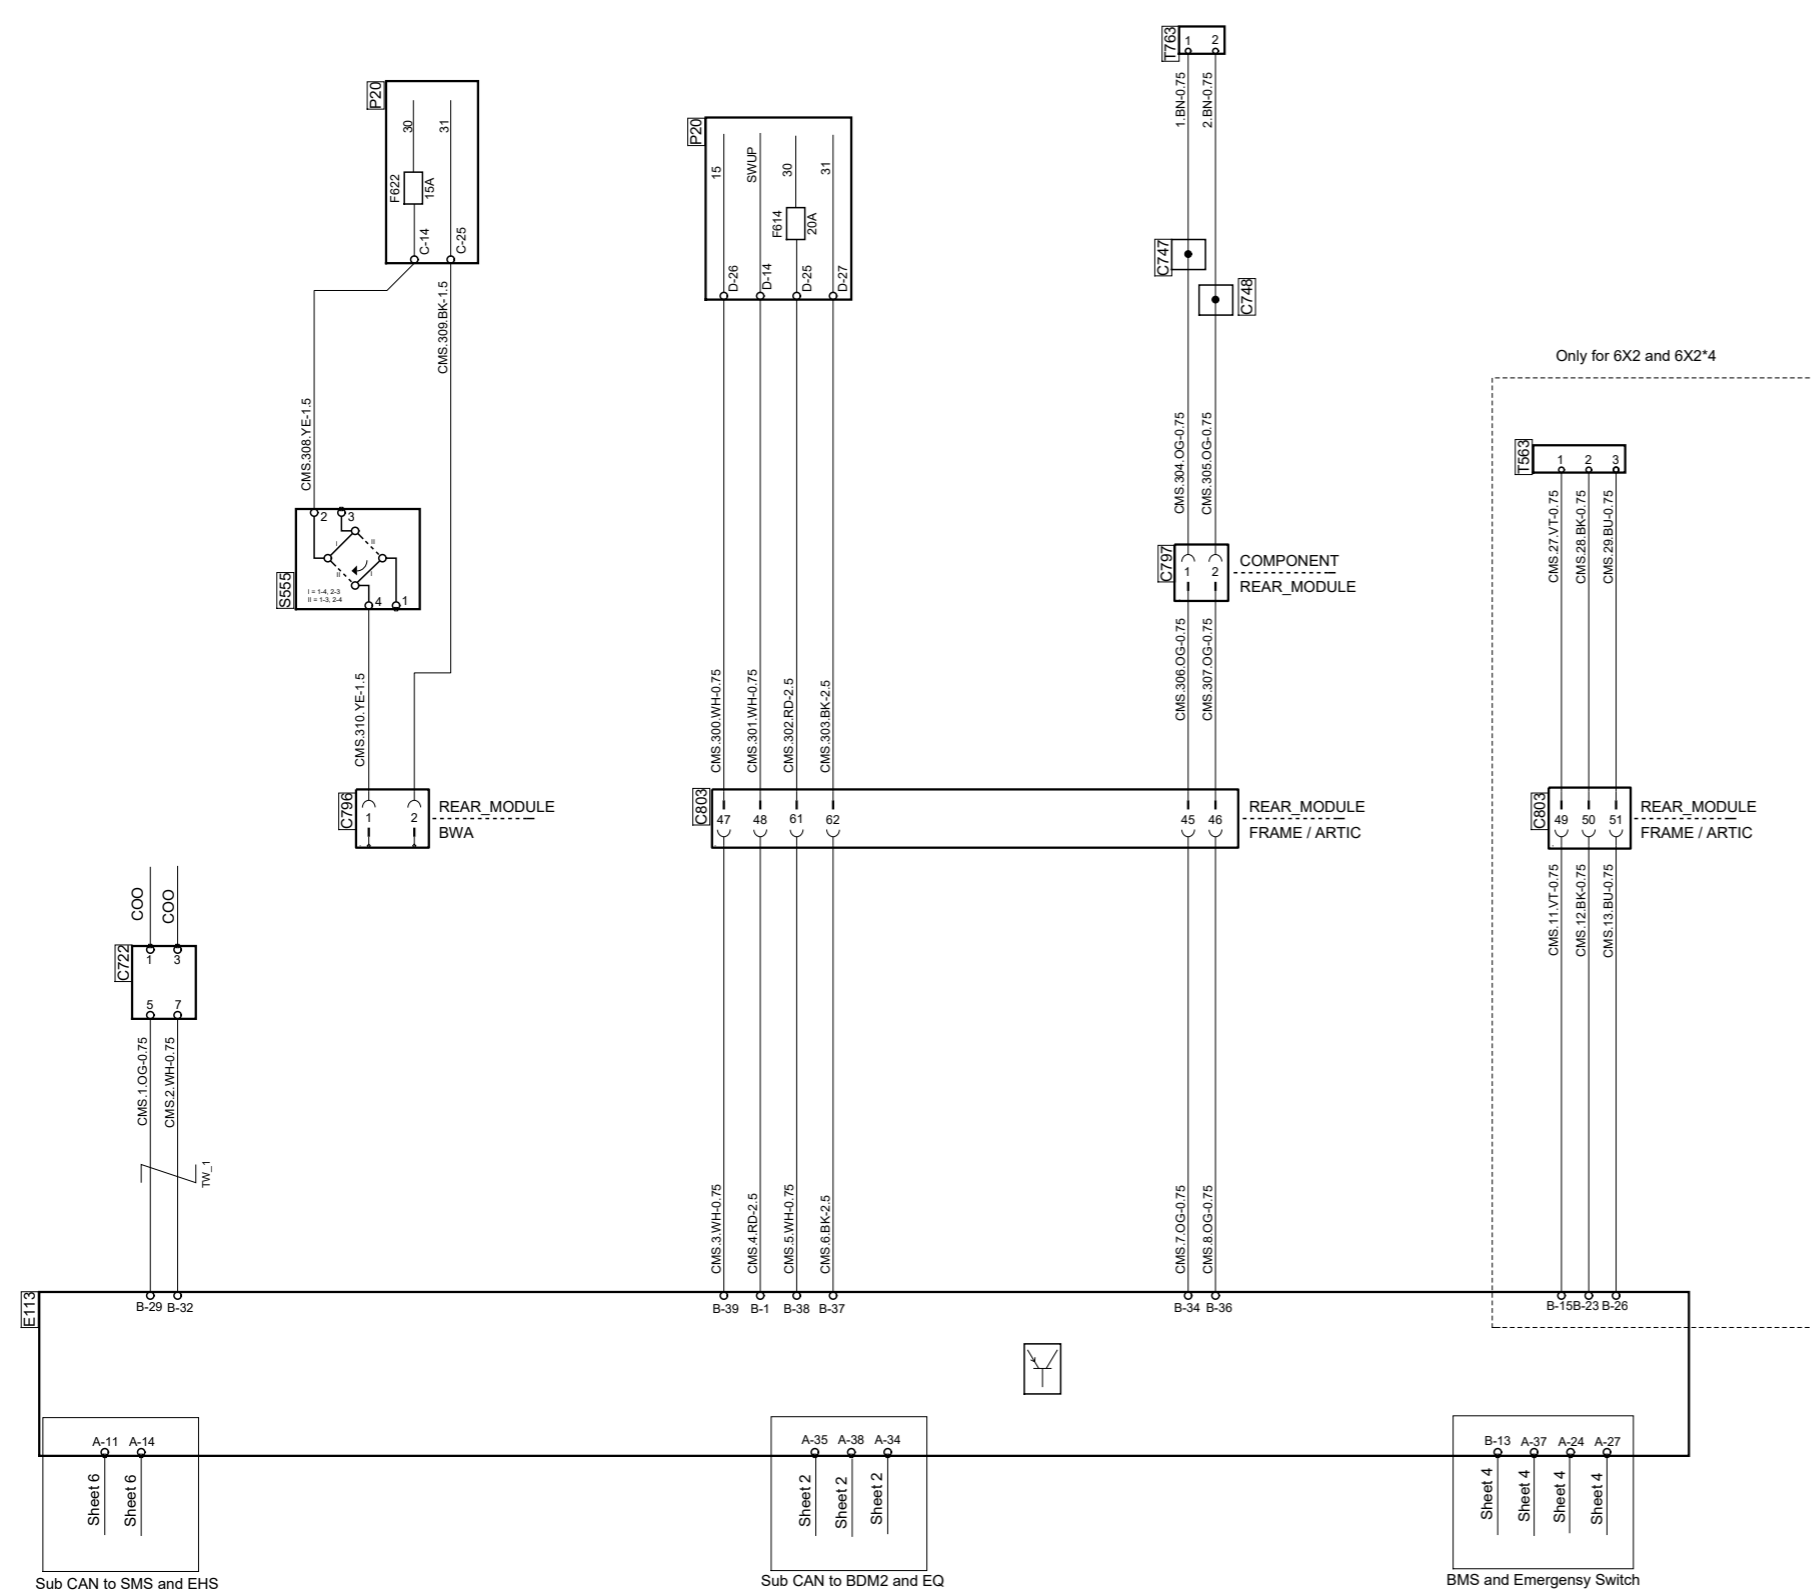

Sub CAN to SMS and EHS

Sub CAN to BDM2 and EQ

BMS and Emergency Switch

Valid for non articulated BEV



Circuit Diagram:

**CMS**

Drawing No.-  
Sheet-Rev: **3081362-3-1**

N.B. The copyright and ownership of this drawing including associated computer data are and will remain ours. They must not be copied, used or brought to the attention of any third party without prior permission (C) Scania, Sweden