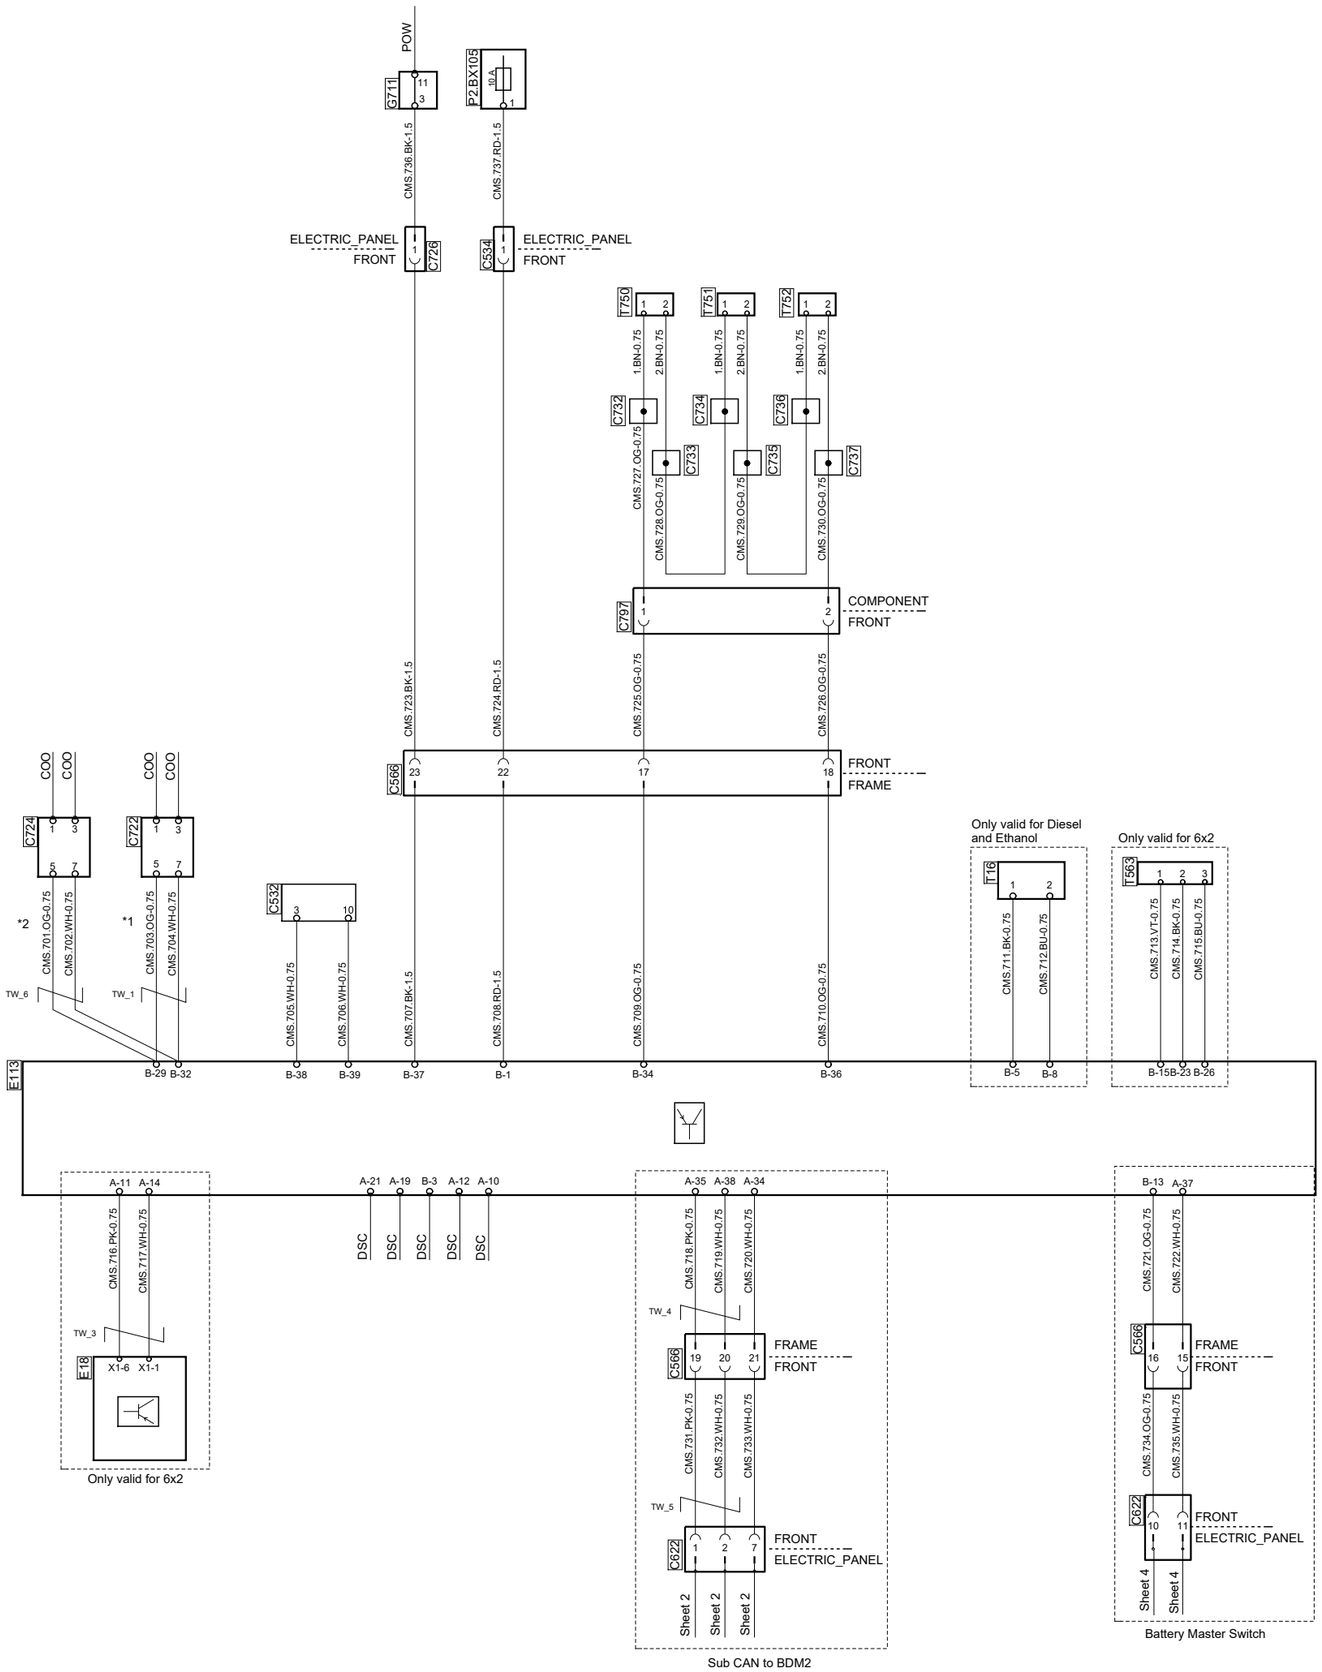

Des.	Pos.	Description
C532	C 7	Joint connector, Wake up
C534	E 6	Connector, 25-pole
C566	B 6	Connector, 62-pole
C622	A 6	Connector, 25-pole
C722	C 7	Joint connector, Orange CAN
C724	C 8	Joint connector, Orange CAN
C726	E 7	Connector, 25-pole
C732	E 6	Splice, Fire alarm
C733	E 6	Splice, Fire alarm
C734	E 6	Splice, Fire alarm
C735	E 6	Splice, Fire alarm
C736	E 5	Splice, Fire alarm
C737	E 5	Splice, Fire alarm
C797	D 6	Connector, 2-pole, Fire alarm
E18	B 7	Control unit , SMS
E113	C 4	Control unit, CMS
G711	F 7	Ground, Joint connector, front
P2.BX105	F 6	Fuse socket, central electric unit
T16	C 5	Sensor, fuel level
T563	C 4	Sensor/Monitor , low brake pressure third axle
T750	E 6	Monitor, Fire alarm
T751	E 6	Monitor, Fire alarm
T752	E 5	Monitor, Fire alarm

Cable designation

AWD35 . OG - 1

Cable marking

Cable colour (Orange)

Conductor area (mm^2)

Colour code of electric cables	
Code	Colour
BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink

Sheet valid only for F-bus
*1 Valid without TPM (3549Z)
*2 Valid with TPM (3549A)

SCANIA

Circuit Diagram:

CMS

Drawing No.- 3081362-7-1
Sheet-Rev:

N.B. The copyright and ownership of this drawing including associated computer data are and will remain ours. They must not be copied, used or brought to the attention of any third party without prior permission (C) Scania, Sweden